


# JWM90A & JWM92A HDMI Changes

Revision Specific

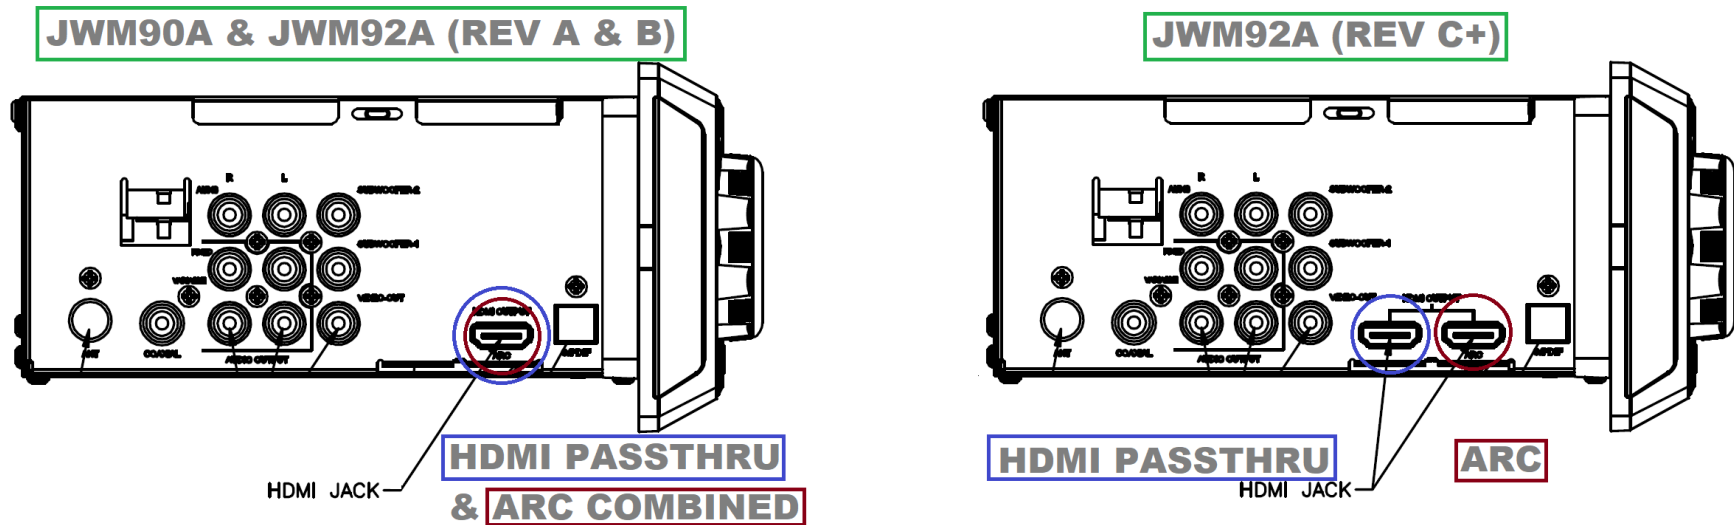

HDMI ARC – Audio Return Channel, allows audio from ARC HDMI port on television to send audio to radio

HDMI Passthru – allows HDMI input on front of radio to output to television, *passing through*

- JWM90A & JWM92A (Rev A & B) have a single HDMI port combination which supports HDMI ARC and HDMI Passthru
- JWM92A (Rev C & newer) has a **two** HDMI ports, one to support ARC, and another to support Passthru
- User may complain of no ARC function and could be caused by HDMI plugged into **non-ARC HDMI port** on JWM92A Rev C & newer
- If replacing JWM90A or JWM92A (Rev A & B) with JWM92A (Rev C & newer), user may need to run additional HDMI cable if using ARC and HDMI Passthru.