



6.2" Touchscreen/Bluetooth®
Multimedia System with Camera Input

JRV4100



KEY FEATURES

- 2 DIN Sleeve mount
- Touch Screen 6.2" TFT display
- Audio Controls with Preset EQ (Classic, Rock, Pop, Jazz, Electric, Rock, User)
- AM/ FM Tuner (USA/Euro)
- 18 Preset Station Memory
- Bluetooth (A2DP; AVRCP; HFP; PBAPP) Streaming Audio Playback
- Front panel USB (Playback of MP3 and WMA audio files)
- Front panel Aux audio/video input
- Rear Camera Input with auto-trigger wire
- 3 Wire power system (Battery, ACC, GND)
- Composite video output (RCA)
- IR remote (Included)
- Clock
- Low Level Audio Output
- Subwoofer Output
- 4 x 40W max Audio Output Power



DESIGNED TO MOVE [YOU]™

asa
ELECTRONICS
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



6.2" Touchscreen/Bluetooth
Multimedia System with camera input

JRV4100

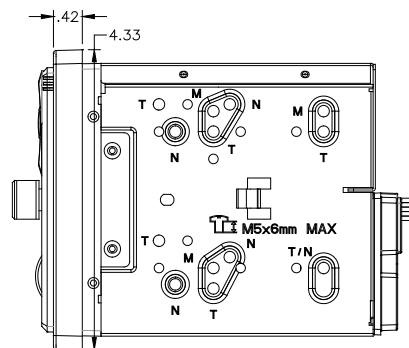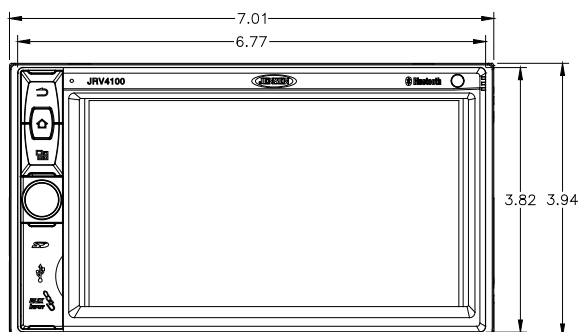

Specifications:

General Specifications

Power System	12V DC	
Operating Voltage Range	9 V to 18 V	
Current Draw @ 12V	Idle	35mA
	Nominal	3.0A
	Maximum	11.5A
Operating Temperature Range	-4°F to 149°F	-20°C to 65°C
Storage Temperature Range	-22°F to 158°F	-30°C to 70°C
Maximum Relative Humidity	95%	
Product Weight (unpackaged)	4 1/2 lb	

Performance Specifications

FM Sensitivity	2.5 uV	
AM Sensitivity	30 uV	
Output Power	RMS	26 W @1%THD
	Maximum	40W x 4
Total Harmonic Distortion	0.5%	
Applied Test Suite	ASA ES0001	
Regulatory Certification	FCC Part 15B; BT; RoHS	