




JSPA3G 3" Waterproof SPA Speaker Installation

This speaker is designed to be flush mounted where space is limited. Locate the desired mounting location. Use the provided template if a 3" hole saw is not available. Be sure to check behind the hole location to ensure you do not damage anything when drilling/cutting. After cutting the hole, insert the speaker or use the template and drill 0.12" (3mm) holes for the mounting screws (included). Connect the positive speaker wire to the 0.187" terminal and the negative speaker wire to the 0.110" terminal.


Specifications:	JSPA3G
Impedance:	4 Ohms
Max Power:	60 Watts
Continuous Power:	30 Watts
Weight:	0.5lb / 0.2kg

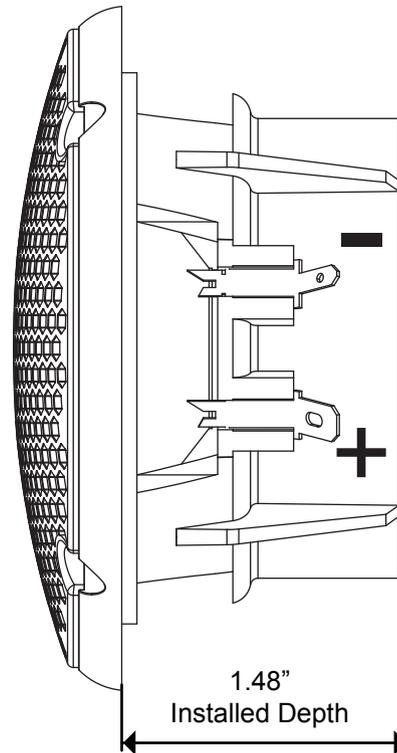

Terminal Sizes

Pos.= 0.187" x 0.032"

Neg.= 0.110" x 0.032"

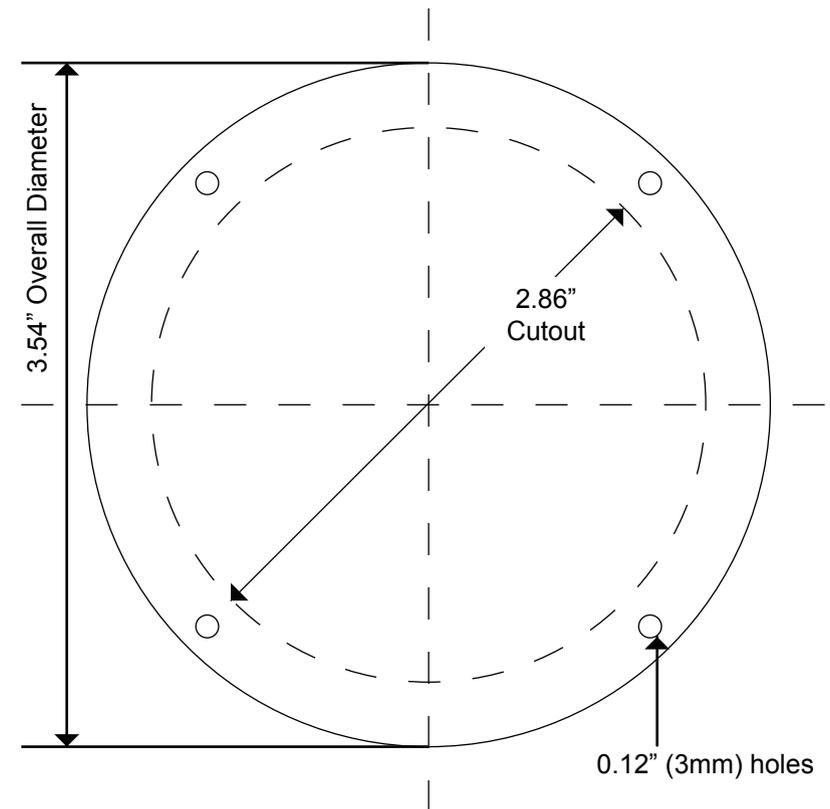

Cutout and use as template for drilling

Scale = 1:1

Note: Faxing or reproducing can change scale