



DESIGNED TO MOVE [YOU]®

CPM100

AM/FM/USB Compact Stereo | 6.5" Coaxial
Two-Way Speakers | Auxiliary Audio Input Jack



KEY STEREO FEATURES

- 160 watts (40W x 4)
- Waterproof (IPX6)
- Compact 3" diameter
- Rear USB input for MP3 enabled devices
- Rear AUX audio input (RCA)
- Rear Line-out audio (RCA)
- Audio tone, balance and fader controls
- Mounts in 3" hole

KEY SPEAKER FEATURES

- Max power handling: 60 watts
- Magnet: 8.4 oz
- Mounting hole diameter: 5"
- Mounting depth: 2.3"
- Tweeter type: Dome
- Tweeter material: Mylar
- Salt Spray Exposure Standard Compliant (ASTM B117)
- UV Exposure Standard Compliant (ASTM D4329)

KEY JPORT FEATURES

- 1/8" auxiliary input with 9ft. RCA cable, includes 3 ft. connection cable for iPod/MP3 player


ASAelectronics
THE MOBILE ELECTRONICS COMPANY SINCE 1977
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

MARINE ENTERTAINMENT



CPM100

AM/FM/USB Compact Stereo | 6.5" Coaxial
Two-Way Speakers | Auxiliary Audio Input Jack

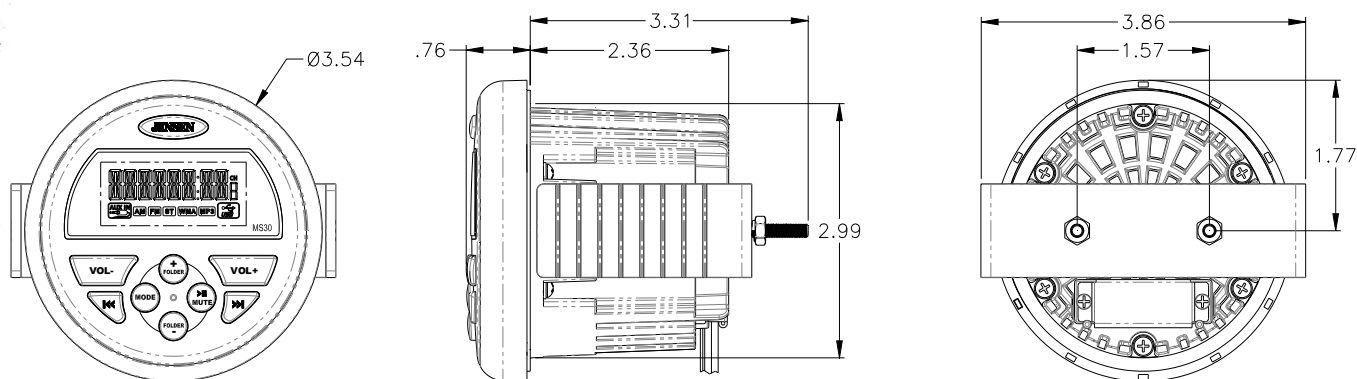

Specifications

General Specifications

Power System		12 VDC
Operating Voltage Range		9 V to 18 V
Current Draw @ 12V	Idle	0 mA
	Nominal	0.8 A
	Maximum	7.8 A
Water Resistance Rating		IPX6
Operating Temperature Range		-4°F to 149°F -20°C to 65°C
Storage Temperature Range		-22°F to 158°F -30°C to 70°C
Maximum Relative Humidity		100%
Overall Dimensions		3" Dia. x 3.35" Depth
Product Weight (unpackaged)		3/4 lb.

Performance Specifications

FM Sensitivity		1 uV
AM Sensitivity		20 uV
Output Power	RMS	15 W x 4
	Maximum	40 W x 4
Total Harmonic Distortion @ 1 Watt		1%
Applied Test Suite		ASA ES0001
Regulatory Certification		FCC Part 15B; CE; RoHS