



Multi-Camera Controller

CSW3



PRODUCT FEATURES

- Three camera inputs
- Compact design
- Compatible with all Voyager cameras, CEC connectors
- One composite A/V output (RCA)
- Three trigger inputs for auto-mode functions
- Monitor trigger output control

Preliminary

DESIGNED TO MOVE [YOU][™]


asa
ELECTRONICS

2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



Multi-Camera Controller

CSW3

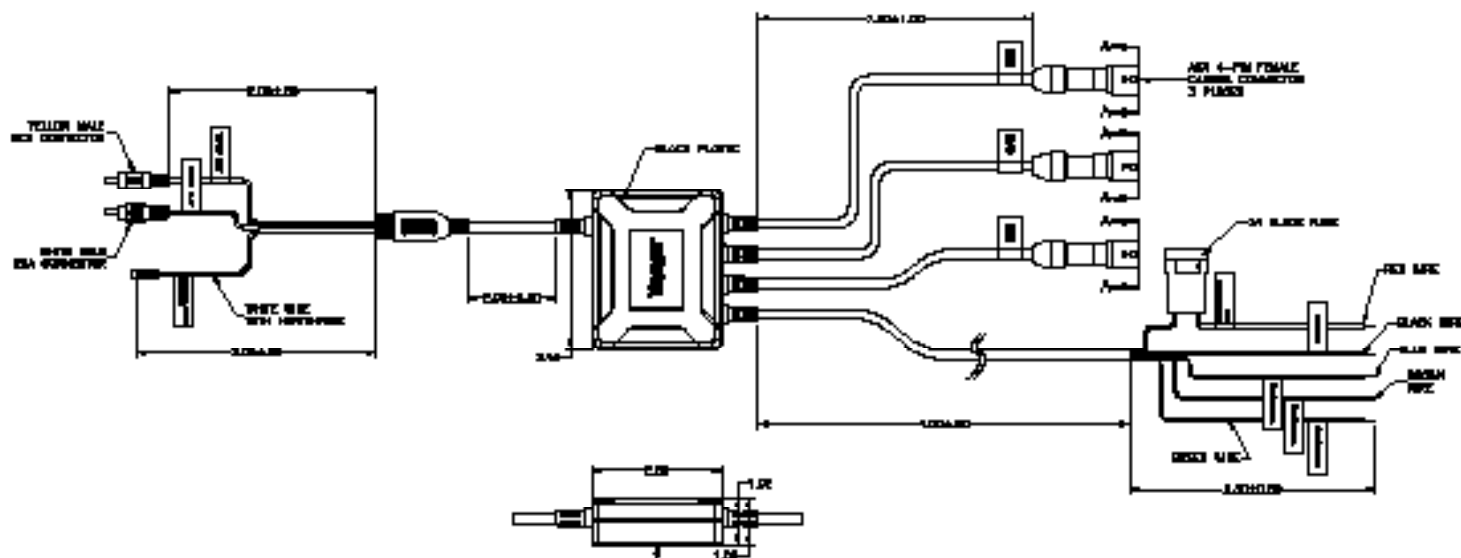

SPECIFICATIONS:

General Specifications:

| | | |
|-----------------------------|---------|---------------------------------|
| Operating Voltage | | 10-16VDC |
| Current Draw @ 12V | Idle | 22 mA |
| | Nominal | 1 Camera 87 mA |
| | Maximum | 3 Cameras 345 mA |
| Operating Temperature Range | | -4°F to 149°F -20°C to 65°C |
| Storage Temperature Range | | -22°F to 158°F -30°C to 70°C |
| Overall Dimensions | | 3.4"W x 1.1" H x 2.8" D |
| Product Weight (unpacked) | | 5.5 oz. |