



JE1912LED

19" LED Television

...the ONLY brand of TVs designed, engineered, tested & built exclusively for over-the-road applications.



PRODUCT FEATURES

- 12 Volt DC Power
- Integrated HDTV (ATSC) Tuner
- HDTV Ready (1080p, 720p, & 480p)
- Convenient Front controls
- Conformal coated circuit boards
- Reinforced cabinet structure and mounting points
- Optional table top stand (STDJE1912)
- VESA 100mm x 100mm mounting pattern
- 12V power connection included
- Table top stand optional (STDJE1912)
- Full function wireless remote control included
- CEC function with AWM975 or other JENSEN CEC-equipped HDMI DVD players
- Dimensions: 18"W x 12"H x 2"D

Inputs/Outputs

- Composite video input x 1 (NTSC/PAL)
- Stereo audio input x 1
- VGA with 3.5mm audio input x1
- RF x 1
- USB media play
- HDMI input x 1 (Supports ARC)
- Selectable (variable/fixed) line level audio output (RCA) x1
- Digital SPDIF audio output (RCA)
- IR repeater (JENSEN DVD control)




ASAElectronics
THE MOBILE ELECTRONICS COMPANY SINCE 1977
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

MARINE ENTERTAINMENT

JENSEN®

JE1912LED

19" LED Television

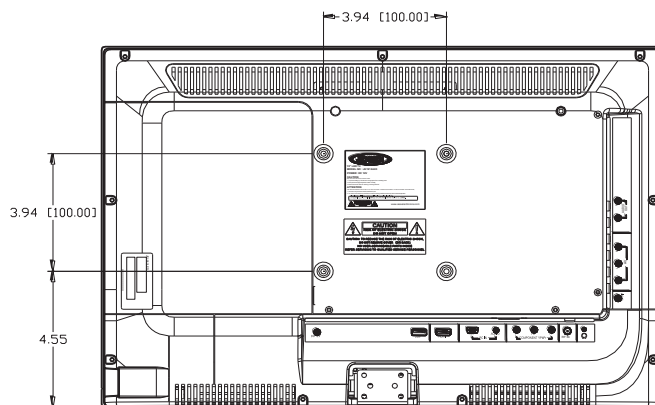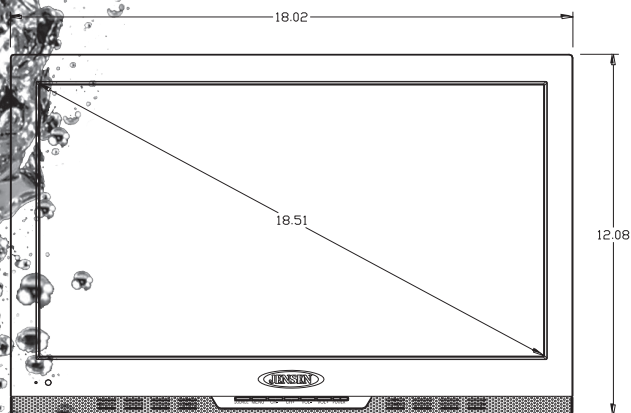

Features:

- DC Power
- White LED Illumination
- High Performance Wide 16:9 LCD panel
- 1366 x 768 WXGA+ Resolution
- 16.7 Million Colors
- Integrated HDTV (ATSC) Tuner
- HD Ready (1080p, 720p, 480p)
- Front Controls
- Inputs/Outputs
 - Composite Video Input x 1 (NTSC/PAL compatible)
 - Component Video Input x 1
 - Stereo Audio Input x 1
 - RF x 1
 - VGA with 3.5 mm Audio Input x 1
 - USB
 - HDMI input x 1 (Supports ARC)
 - Selectable (Variable/Fixed) Line Level Audio Output (RCA) x 1
 - Digital SPDIF Audio Output (RCA) x 1
- VESA 100mm x 100mm Mounting Pattern
- Full function wireless remote control included
- DC Power Cord Included
- Table Top Stand Optional (P/N STDJE1912)
- Cigarette Adapter Cable optional (P/N DCCIG09)
- CEC function with AWM975 or other Jensen CEC-equipped HDMI DVD players

Specifications:

General Specifications:

Power System	DC 12V	
Power Consumption	44mA stand by	1.7A max
Operating Temperature Range	-4°F to 149°F	-20°C to 65°C
Storage Temperature Range	-22°F to 158°F	-30°C to 70°C
Maximum Relative Humidity	85%	
Overall Dimensions	18" W x 12" H x 2" D (without stand)	
Product Weight (unpacked)	8lbs 5oz	
Regulatory Certification(s)	FCC	

Performance Specifications:

Video / Display System		NTSC/ATSC/PAL	
Video Input Signal (Composite)		1Vp-p @ 75 ohms	
Audio Output		5W x 2	
LCD Specifications	Diagonal Size	18.5"	
	Resolution	1366 x 768	
	Brightness	250 nit	
	Contrast Ratio	3000 : 1	
	View Angles	Top	88°
		Bottom	88°
		Left	88°
		Right	88°
	Display Format		16 : 9
	Response Time	Rise	8.5 mSec
		Fall	