

**JENSEN**  
*PowerSports*  
AUDIO

AM|FM|USB|iPod® & iPhone®  
SiriusXM-Ready™ | Bluetooth® Stereo

# JHD1635BT



## PRODUCT FEATURES

- 12V DC power
- 180 watts max power output (45W x 4)
- Bluetooth® streaming audio and controls (A2DP/AVRCP) with hands-free calling (HFP)
- Electronic AM/FM tuner (US/Euro)
- iPod®/iPhone® ready via USB
- SiriusXM-Ready®
- Seven-channel NOAA weatherband with S.A.M.E. technology
- USB 2.0 for playback of MP3 & WMA audio files
- RBDS with PTY search
- Front and rear USB input
- Front and rear AUX input
- Pre-amp out (RCA)
- 12/24 hour selectable clock with Super-Cap 30-day power backup
- Beep tone confirmation (can be turned off)
- EQ presets (Flat/Rock/Pop/Classical/Custom)
- Low battery alert (voltage < 10.8 VDC)
- IR remote control ready (sold separately)
- Wired remote control ready (JHDHBC sold separately)
- Conformal coated PCB
- Non-volatile memory
- Preset tuning
- Channel lock

## ADD-ON ACCESSORIES



JHDHBC Handlebar  
Remote Control



USB and 1/8" AUX input  
interface cable



*Included:*

**JMICHFP Omnidirectional Microphone**

Works with all JENSEN® Heavy Duty  
Bluetooth®-enabled stereos



# We Play Dirty!

**asa**  
ELECTRONICS™

2602 Marina Drive • Elkhart, IN 46514  
www.asaelectronics.com



# AM|FM|USB|iPod® & iPhone® SiriusXM-Ready™ | Bluetooth® Stereo **JHD1635BT**

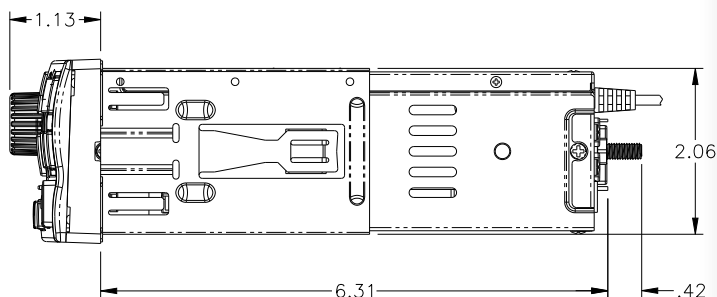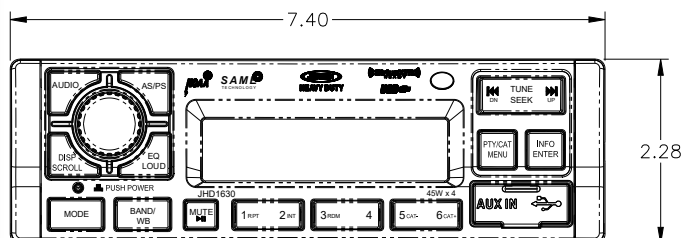

## **Specifications**

### **General Specifications**

<b>Power System</b>		<b>12 VDC</b>
<b>Operating Voltage Range</b>		<b>9 V to 18 V</b>
<b>Current Draw @ 12V</b>	<b>Standby</b>	<b>0 A</b>
	<b>Nominal</b>	<b>2.0 A</b>
	<b>Maximum</b>	<b>10 A</b>
<b>Operating Temperature Range</b>		<b>-22°F to 185°F    -30°C to 85°C</b>
<b>Storage Temperature Range</b>		<b>-40°F to 185°F    -40°C to 85°C</b>
<b>Maximum Relative Humidity</b>		<b>95%</b>
<b>Overall Dimensions</b>		<b>6.3" x 7.4" x 2.1"</b>
<b>Product Weight (unpacked)</b>		<b>2.5 lbs.</b>

### **Performance Specifications**

<b>FM Sensitivity</b>		<b>2.2 uV</b>
<b>AM Sensitivity</b>		<b>20 uV</b>
<b>Output Power</b>	<b>RMS</b>	<b>20 W x 4</b>
	<b>Maximum</b>	<b>45 W x 4</b>
<b>Total Harmonic Distortion @ 1 Watt</b>		<b>1%</b>
<b>Applied Test Suite</b>		<b>ASA ES0013</b>
<b>Regulatory Certification</b>		<b>FCC Part 15B / E-Mark</b>