



8" Amplified Subwoofer [JMPSW800]



KEY FEATURES:


- Max Power Handling: 200 watts
- Power System: 12VDC
- Slim design
- Built-in amplification
- Black anodized all aluminum enclosure
- Mate-in-lock connectors for easy installation
- Adjustable gain and crossover
- Low (line) level inputs
- Frequency: 60Hz-200Hz
- Vertical and horizontal mounting provisions
- Dimensions: 13.6"W x 10.4"H x 2.9"D

MARINE CERTIFIED

asa
ELECTRONICS®
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



8" Amplified Subwoofer [JMPSW800]

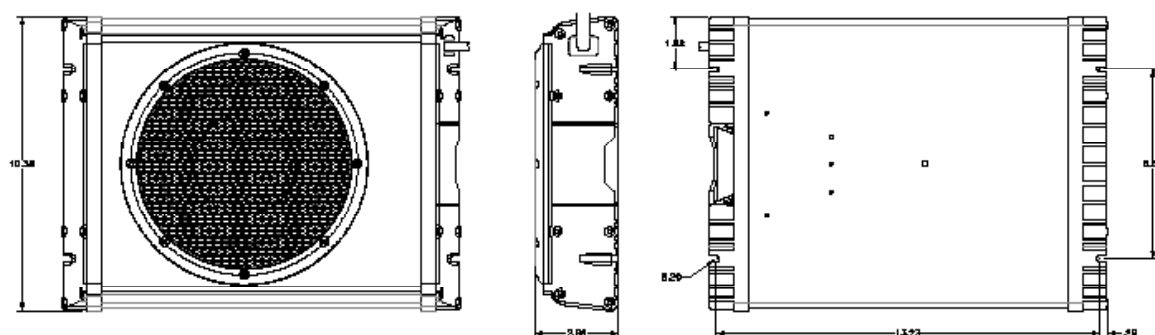

General Specifications			
Power System		12VDC	
Operating Voltage Range		10.5VDC to14.7 VDC	
Current Draw @ 12V	Idle	300mA	
	Nominal	7.3A	
	Maximum	10A	
Operating Temperature Range		-4°F to 149°F	-20°C to 65°C
Storage Temperature Range		-22°F to 158°F	-30°C to 70°C
Maximum Relative Humidity		95%	
Overall Dimensions		13.6"x 10.4"x 2.9"	
Product Weight (unpacked)		8.0 lbs	
Speaker / Amplifier Specifications			
Voice Coil Impedance		4 Ohms	
Voice Coil Size		1.5"	
Magnet Size		3.9" X 0.6"	
Frequency Response		60 Hz TO 200Hz	
RMS Power Output		100 W	
MAX Power Output		200 W	
SPL @ 1Watt/1Meter		81dB	
Low Level Input Range		0 – 1V	