



JMS2012

AM|FM|WB|iPod|SIRIUS® Satellite Radio Ready Waterproof Stereo



KEY FEATURES

- Waterproof (IPX5) faceplate
- Blue LED backlighting
- Electronic AM/FM tuner (US/Euro selectable)
- RBDS with PTY search
- NOAA 7-channel weather band
- Full iPod/iPhone controls and charging
- Sirius satellite radio ready (requires subscription)
- JDAB wired remote ready compatible with JWR200
- Rear AUX-in (RCA)
- Pre-Amp out: rear channel only (RCA)
- EQ presets (flat, rock, pop, classical, user settings)
- Conformal coated circuit boards
- UV resistant: ASTMD4329 compliant
- Corrosion resistant finish: ASTMB117 compliant
- Max output power: 160 watts (40W x 4)
- Low battery alert
- Standard DIN chassis
- Regulatory certifications: FCC, CE, RoHS



jPortG
JENSEN 1/8" Auxiliary Input Jack
connects MP3 player



ASAelectronics
THE MOBILE ELECTRONICS COMPANY SINCE 1977
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

MARINE ENTERTAINMENT



JMS2012

AM|FM|WB|iPod|SIRIUS® Satellite Radio Ready Waterproof Stereo

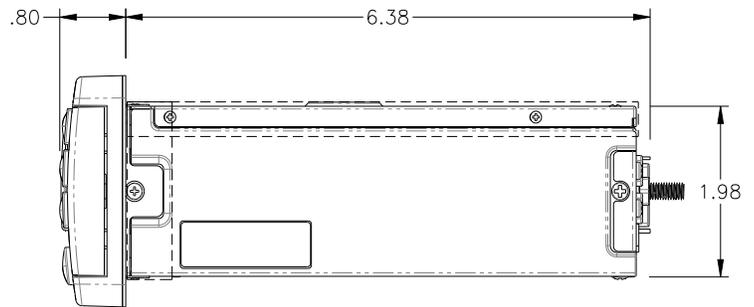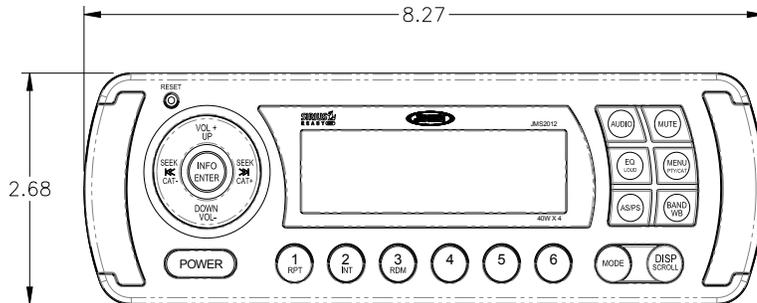

Specifications

General Specifications

Power System	12 VDC	
Operating Voltage Range	10 V to 16 V	
Current Draw @ 12V	Idle	48 mA
	Nominal	1.5 A
	Maximum	10.0 A
Operating Temperature Range	-4°F to 149°F	-20°C to 65°C
Storage Temperature Range	-22°F to 158°F	-30°C to 70°C
Maximum Relative Humidity	100%	
Overall Dimensions	2.7" H x 6.4" L x 8.3" D	
Product Weight (unpackaged)	3.0 lb	

Performance Specifications

FM Sensitivity	1.5 uV	
AM Sensitivity	50 uV	
Output Power	RMS @ 1% THD	21 W/ Channel
	Maximum	40 x 4 Watts
Total Harmonic Distortion (FM Mode)	2 %	
Applied Test Suite	ASA ES0001	
Regulatory Certification	FCC Part 15B; CE; RoHS	