




JMS2212

AM|FM|WB|USB|iPod & Sirius® Satellite Ready Waterproof Stereo



Commander

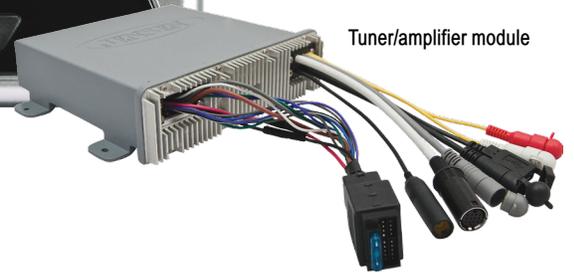

Tuner/amplifier module

KEY FEATURES

- 200 watts
- Full iPod/iPhone controls and charging
- SIRIUS satellite-ready – Direct Connect
- USB input supports MP3/WMA formats
- Seven-channel NOAA weatherband tuner
- Full Dot Matrix Display
- Waterproof commander (IPX6) and module (IPX5)
- Auxiliary audio input (RCA)
- Waterproof (IPX6 rated)
- Wired Remote Ready (JWR200)
- Positive LCD Display
- Preamp Line Level Outputs
- Non-volatile memory for presets & user settings
- Two-wire power (ACC, GND)
- Conformal-coated PCB
- Plastic PCB insulator
- Sealed chassis
- Radio Broadcast Data System (RBDS)
- Low battery audible warning
- Zero current memory draw
- Corrosion resistant materials/finishes (ASTM B117)
- UV resistant front panel (ASTM D4329)
- Commander Dimensions: 5.1" W x 3.7" H x 1.2" D




1/8" Auxiliary Input & USB Interface (optional)

ASAelectronics
 THE MOBILE ELECTRONICS COMPANY SINCE 1977
 2602 Marina Drive • Elkhart, IN 46514
 www.asaelectronics.com



JMS2212

AM|FM|WB|USB|iPod & Sirius® Satellite Ready Waterproof Stereo

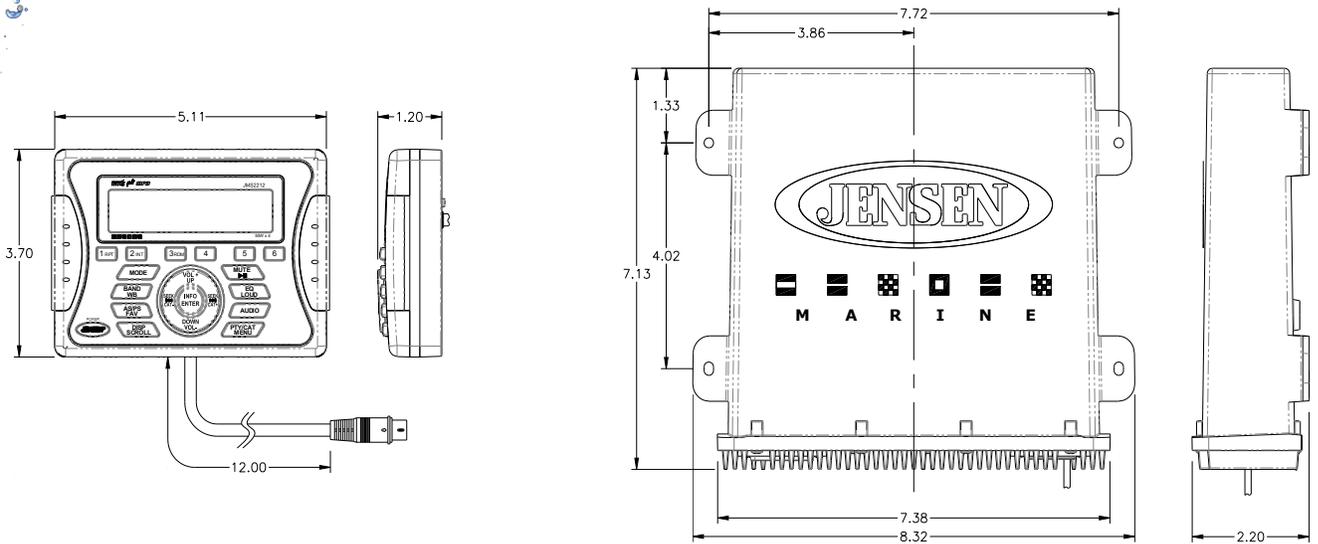

Specifications

General Specifications

Power System		12VDC	
Operating Voltage Range		10V to 16V	
Current Draw @ 12V	Idle	85 mA	
	Nominal	1.8 A	
	Maximum	11 A	
Operating Temperature Range		14°F to 140°F	-10°C to +60°C
Storage Temperature Range		-4°F to 158°F	-20°C to +70°C
Maximum Relative Humidity		100%	
Overall Dimensions		-	
Product Weight (unpacked)		2.7 lbs	

Performance Specifications

FM Sensitivity		2 uV
AM Sensitivity		30 uV
CD Frequency Response		-
CD Signal to Noise		-
CD Skip Threshold (Random Freq. Profile)		-
Compatible CD Formats		-
Output Power	RMS @ 1% THD	20.4 W per channel
	Maximum	50 x 4 W
Total Harmonic Distortion @ 1 Watt		0.1 %
Applied Test Suite		ASA ES0001
Regulatory Certification		FCC Part 15B; CE; CTick; UL60065; RoHS