



DESIGNED TO MOVE [YOU]®

JMS7010

AM|FM|USB|CD|iPod and Sirius Satellite Ready Waterproof Stereo



KEY FEATURES

- 200 Watts
- Full iPod/iPhone controls and charging
- SIRIUS Satellite Radio Ready - Direct Connect
- USB input supports MP3/WMA formats
- NOAA Weatherband
- Full Dot Matrix Display
- Auxiliary Audio Input (RCA)
- Waterproof (IPX6 rated)
- Wired Remote Ready (JWR200)
- Positive LCD Display
- Preamp Line Level Outputs
- 30 Seconds of Electronic CD Skip Protection
- Non-volatile memory for presets & user settings
- 2-wire power (ACC, GND)
- Conformal Coated PCB
- Plastic PCB Insulator
- Sealed Chassis
- Radio Broadcast Data System
- Low Battery Audible Warning
- Zero Current Memory Draw
- ASTM B117 Salt Spray Exposure Standard Compliant
- ASTM D4329 UV Exposure Standard Compliant
- Overall Dimensions: 8-2/3"W x 3-2/3"H



Optional JWR200 Wired Remote



Optional USB Interface & 1/8" Auxiliary Input


ASAelectronics.
THE MOBILE ELECTRONICS COMPANY SINCE 1977
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

MARINE ENTERTAINMENT

JENSEN®

JMS7010

AM|FM|USB|CD|iPod and Sirius Satellite Ready Waterproof Stereo

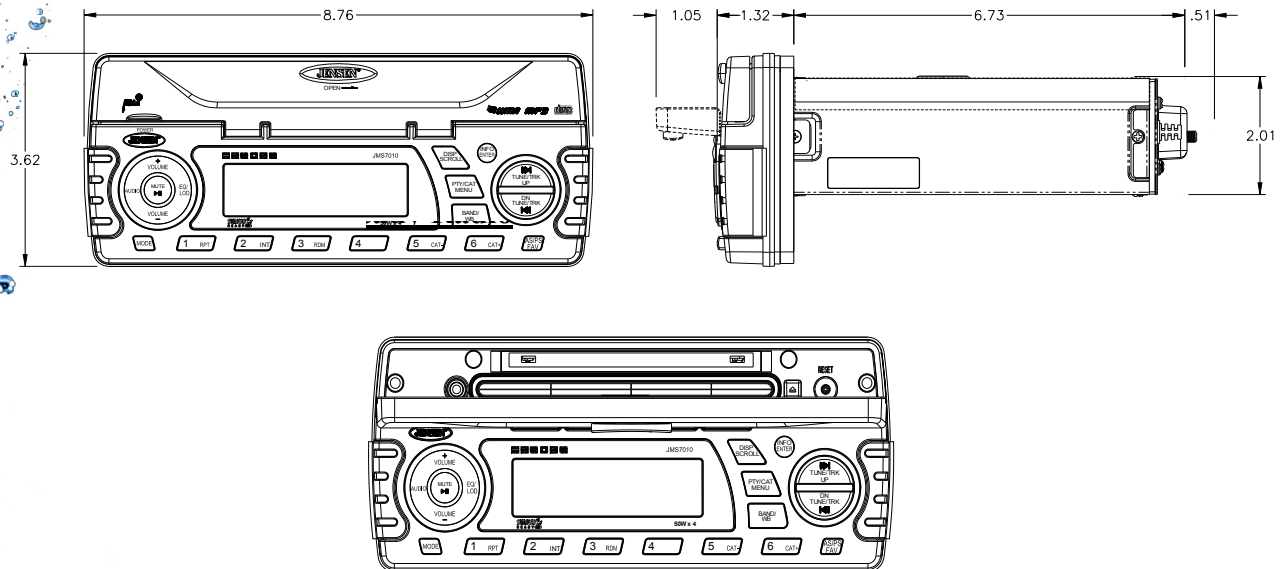

Specifications

General Specifications

Power System		12 VDC
Operating Voltage Range		10 V to 16 V
Current Draw @ 12V	Idle	80 mA
	Nominal	2.5 A
	Maximum	10 A
Operating Temperature Range		-4°F to 149°F -20°C to 65°C
Storage Temperature Range		-22°F to 158°F -30°C to 70°C
Maximum Relative Humidity		100%
Overall Dimensions		9.5" x 8.8" x 3.6"
Product Weight (unpackaged)		5.5 lbs.

Performance Specifications

FM Sensitivity		3.5 uV / 1.6 uV
AM Sensitivity		18 uV / 25 uV
CD Frequency Response		20 Hz to 20 kHz
CD Signal to Noise		>65 dB
CD Skip Threshold (Random Freq. Profile)		1.6 g
Compatible CD Formats		Audio CD, CD-R, R/W, CD-DA, MP3, WMA
Output Power	RMS	4 x 23 Watts
	Maximum	4 x 50 Watts
Total Harmonic Distortion @ 1 Watt		<0.5%
Applied Test Suite		ASA ES0001
Regulatory Certification		FCC Part 15B / CE