



DESIGNED TO MOVE [YOU]®

# JWR250

Waterproof Wired Remote



## Key Features:

- Compatible with JENSEN JMS series stereos only
- Waterproof design (IPX6 rated)
- Conformal coated circuit boards
- Full function sunlight readable display (positive type LCD)
- Removable chrome trim ring
- UV-resistant finishes/materials (meets ASTM D4329)
- Corrosion-resistant materials (meets ASTM B117)
- Ignition protection certified
- Surface or in-panel mounting options
- Dimensions: 4.125"W x 2.625"H x 1"D



## JWREXT Extension Cable

- 18' extension cable for JWR250 wired remote control
- Also available in 10' (JWREXT10) & 25' (JWREXT25)



## JWRYCBLS Extension Cable

- "Y" cable for addition of multiple JWR250 remote controls

**ASAelectronics.**  
THE MOBILE ELECTRONICS COMPANY SINCE 1977  
2602 Marina Drive • Elkhart, IN 46514  
[www.asaelectronics.com](http://www.asaelectronics.com)


MARINE ENTERTAINMENT

Features and specifications subject to change without notice.



# JWR250

Waterproof Wired Remote

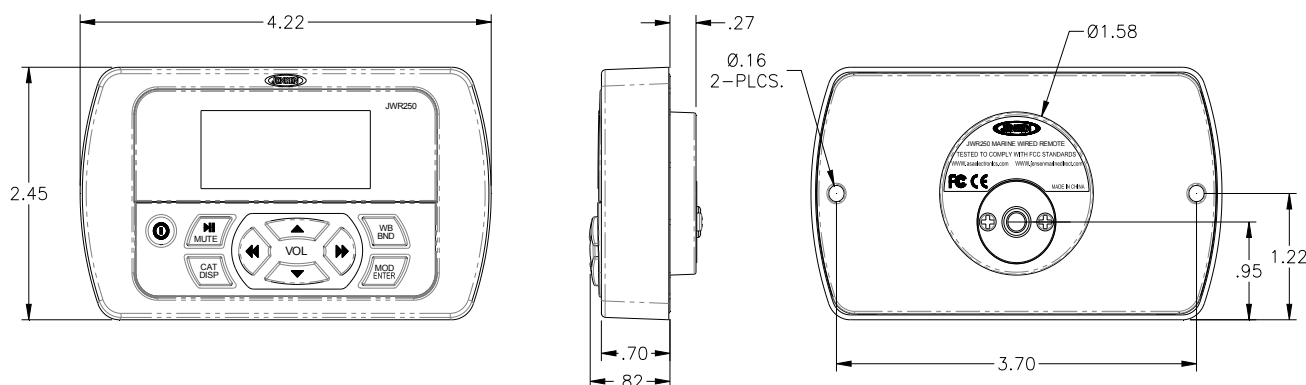

## Specifications

### General Specifications

|                                    |                            |               |
|------------------------------------|----------------------------|---------------|
| <b>Water Resistance Rating</b>     | IPX6                       |               |
| <b>Operating Temperature Range</b> | -4°F to 149°F              | -20°C to 65°C |
| <b>Storage Temperature Range</b>   | -22°F to 158°F             | -30°C to 70°C |
| <b>Maximum Relative Humidity</b>   | 100%                       |               |
| <b>Overall Dimensions</b>          | 4.25"(L) x 2.45(H) x 1"(D) |               |
| <b>Product Weight (unpackaged)</b> | 5 ounces.                  |               |
| <b>Applied Test Suite</b>          | ASA ES0001                 |               |
| <b>Regulatory Certification</b>    | FCC Part 15B / CE /        |               |