



# High Performance 3" 2-Way [JXH030HPC]



## KEY FEATURES:


- Max power handling: 60 watts
- RMS power: 30 watts
- Waterproof bridged woofer/tweeter
- Polypropylene cone
- Rubber suspension/surround
- Four-layer ASV voice coil
- Ferro fluid cooling on tweeter
- Fixed grille
- Removable tuned rear enclosure
- Threaded nut mounting solution for low profile applications
- Corrosion resistant sealed design
- UV resistant (ATSM-D4329 compliant)

MARINE CERTIFIED

**asa**  
ELECTRONICS  
2602 Marina Drive • Elkhart, IN 46514  
[www.asaelectronics.com](http://www.asaelectronics.com)



# High Performance 3" 2-Way [JXH030HPC]

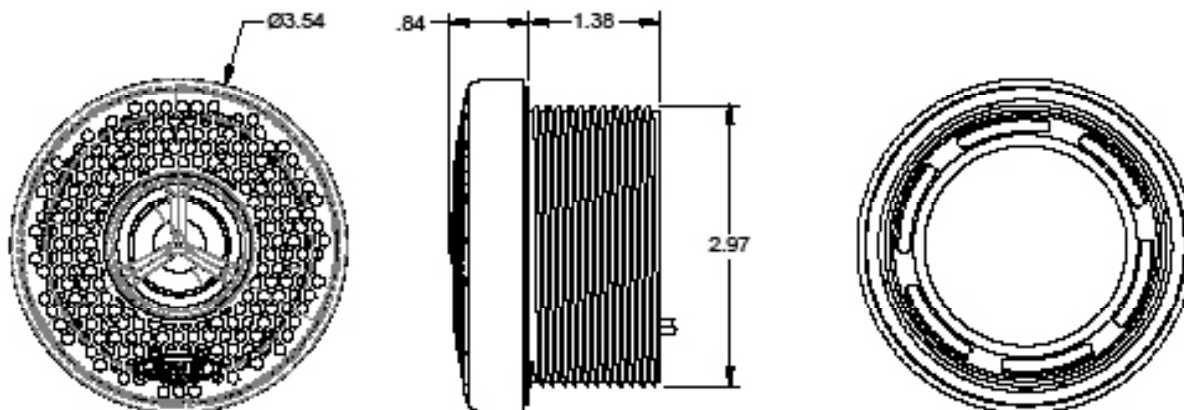

## **Specifications:**

### **General Specifications:**

Woofer Size	3"	
Woofer Material	Poly-propylene	
Tweeter Type	Dome	
Tweeter Material	Silk / Neodymium Magnet	
Voice Coil Size	0.75"	
Magnet Weight	4.2 oz	
Mounting Depth	3.3"	
Hole Size	3"	
Impedance	4 $\Omega$	
Temperature Range	-30°C - 70°C	-22°F - 158°F
Max RH	100%	
Terminal Size	Positive - 0.205"	Negative - 0.110"

### **Performance Specifications:**

Frequency Response	90 Hz – 20 KHz
RMS Power Range	30 W
Max Power	60 W
SPL @ 1 W/ 1 M	83 dB
Resonant Frequency	150 Hz