

## **3" Universal Mount** Two-Way Speakers JXHD30PS



## **KEY FEATURES**

- 60W (30W RMS) max handling power
- Waterproof bridged woofer/tweeter
- · Polypropylene cone
- Ferro fluid cooling on tweeter
- Rubber suspension/surround
- Four-layer ASV voice coil
- U-bracket included
- Rear AMPS mounting pattern for additional mounting options
- Fixed grille
- Corrosion resistant (D1141 98)
- UV resistant (ATSM D4329)
- Dimensions: 4.1" W x 4.1" H x 3.11" D


4.37" W x 4.33" H x 3.11" D (w/ bracket)





separately. Shown for demonstraion purposes only.



## **3" Universal Mount** Two-Way Speakers JXHD30PS



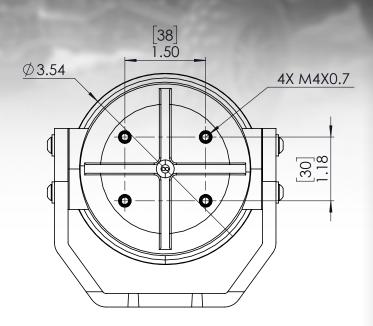

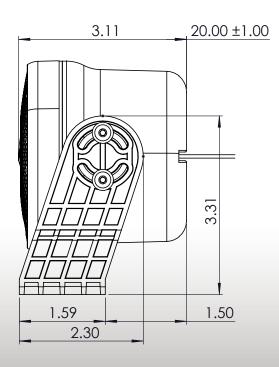

## **Specifications:**

General Specifications:		
Woofer Size	3"	
Woofer Material	Poly-propylene	
Tweeter Type	Dome	
Tweeter Material	Silk / Neodymium Magnet	
Voice Coil Size	0.75"	
Magnet Weight	4.2 oz	
Impedance	4 Ω	
Temperature Range	-30°C - 70°C	-22°F - 158°F
Max RH	100%	
Terminal Size	Positive - 0.205"	Negative – 0.110"

**Performance Specifications:** 

Frequency Response	90 Hz – 20 KHz	
RMS Power Range	30 W	
Max Power	60 W	
SPL @ 1 W/ 1 M	83 dB	
Resonant Frequency	150 Hz	