

Voyager®

7" Heavy Duty LCD Observation Monitor

AOM7694HD



PRODUCT FEATURES:

- Four camera inputs
- Viewing options: single, split screen, tri-view, quad-view
- Built-in speaker
- Backlit controls
- 12V and 24V system compatible
- NTSC and PAL video signal compatible
- Manual (pushbutton) or automatic (trigger) source selection
- Turn-signal (pulsed DC) compatible trigger inputs (AV2, AV3)
- Auto power on (standby)
- Day/Night brightness modes
- Anti-glare/scratch protective lens
- Multiple mounting options (AMPS compatible)

FEATURES

QU4D VIEW


EXPAND your vision™

asa
ELECTRONICS™

2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

Voyager®

7" Heavy Duty LCD Observation Monitor AOM7694HD

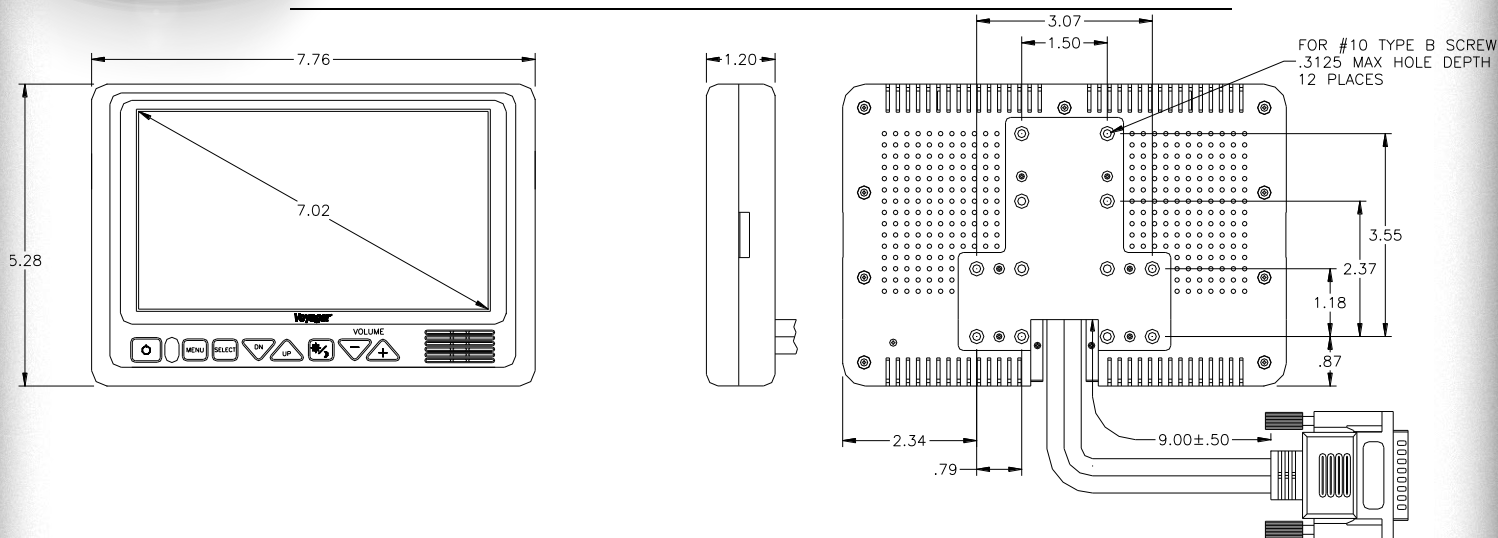

SPECIFICATIONS:

General Specifications:

Power System		12/24VDC
Operating Voltage Range		10V to 32V
Current Draw @ 12V	Idle	240mA
	Nominal	830mA
	Maximum	1200mA
Operating Temperature Range		-4°F to 149°F -20°C to 65°C
Storage Temperature Range		-40°F to 176°F -35°C to 80°C
Maximum Relative Humidity		95%
Overall Dimensions		7 3/4"W x 5 1/4"H x 1 3/16"D
Product Weight (unpackaged)		2.8lbs

Performance Specifications:

Video / Display System			NTSC/PAL	
Audio Output			1W	
LCD Specifications	Diagonal Size		7.0"	
	Resolution		800(H) x 3 (RGB) x 480 (V)	
	Brightness		450 nit	
	Contrast Ratio		400:1	
	View Angles	Top	60° min	
		Bottom	60° min	
		Left	70° min	
		Right	70° min	
	Display Format		16:9	
	Response Time	Rise	20ms	
Fall				
Backlight Type		LED		
Backlight Life		10,000 Hours		