

# Voyager<sup>®</sup>

Digital Wireless Surveillance System

## BARNVIEW1

Keep an eye on your farm



### KEY SYSTEM FEATURES:

- Use for monitoring animals or farm equipment
- Up to 1000 ft. viewing range\*
- Use with up to four cameras - one camera included (BARNVIEWCAM)
- Email alert available with motion detection when turned on
- Built-in DVR
- View live images from a phone or tablet
- Maximum 32GB SD card allowable (not included)
- Excellent night vision
- Alarm clock
- Works with iPhone/iPad/iPod touch and Android-powered smartphone and tablets (Use the free OMGuard app)
- Optional language setting
- Included docking station for monitor
- CE Certified

\* Distance may vary depending on location of camera, monitor and antennas

### KEY MONITOR FEATURES:

- 7" Portable quad-view touch screen LCD monitor
- Up to four live views may be displayed at one time
- Internet connection via cradle
- DVR (SD card not included)
- Resolution: 800 x 480
- Channels: 4
- 3dBi antenna for portable use
- 5dBi antenna with 9.5' extension cable and mounting bracket
- Dimensions: 7.2"W x 5"H x 1.1"D

### KEY CAMERA FEATURES:

- Waterproof
- Day/night mode
- Viewing angle: 80°
- Microphone
- Protective hood
- 20 IR/LED's
- 5dBi antenna with 29.5' extension cable and mounting bracket
- Dimensions: 5.9"W x 1.9"H x 2.9"D


EXPAND your vision™

**asa**  
ELECTRONICS™

2602 Marina Drive • Elkhart, IN 46514  
[www.asaelectronics.com](http://www.asaelectronics.com)

# Voyager®

## Digital Wireless Surveillance System BARNVIEW1

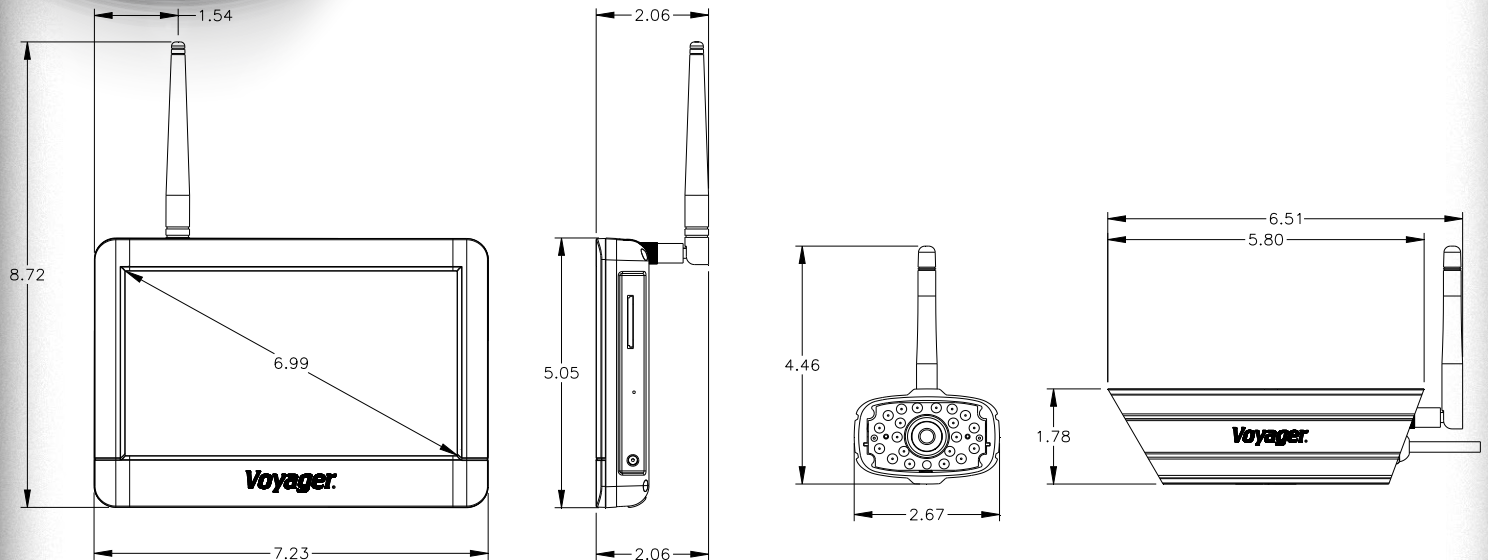

Specifications	CAMERA	MONITOR
Power System	5VDC	5VDC
Input Voltage Range	100 ~ 240VAC 50/60 Hz	100 ~ 240VAC 50/60Hz
Power Consumption (MAX)	0.2A	0.2A
Operating Temperature Range	-4°F to 149°F	14°F to 122°F
Storage Temperature Range	-22°F to 158°F	-14°F to 122°F
Operating Relative Humidity	100%	95%
Waterproof Rating	IPX6	NA
Overall Dimensions	5.9" x 2.9" x 1.9"	7.3" x 5" x 1.1"
Product Weight (unpackaged)	11.2 oz	16 oz
Video Output Signal Format	NTSC	NTSC
Video Signal Level	1.0V p-p ; 75Ω	1.0V p-p ; 75Ω
Audio	Microphone	1 watt
Sensor	1/3" CMOS	NA
Sensitivity	0 Lux	NA
Image Orientation	Mirror (Reversed)	NA
Resolution	640 x 480	800(W) x 480(H)
View Angles	77°(D) 61°(H) 46°(V)	150°(H) 130°(V)
Brightness	NA	350 nit
Contrast Ratio	NA	400:1
Response Time	NA	15ms(R) 20ms(F)
Display Format	NA	16:9