

Voyager[®]

Front Sensor System

CVFPS16



PRODUCT FEATURES:


- Proximity detection and warning system with four bumper or body mount sensors
- Seamlessly integrates into any Voyager monitor
- Trigger output to switch monitor to front camera
- Waterproof and dustproof camera
- Compatible with JENSEN touchscreen stereo
- Audible warnings to driver when approaching obstacle
(solid beep: 0-12", 1/4 second interval beep: 12"-24", 1/2 second interval beep: 24"-36")

EXPAND your vision™

asa
ELECTRONICS™
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

Voyager[®]

Front Sensor System CVFPS16

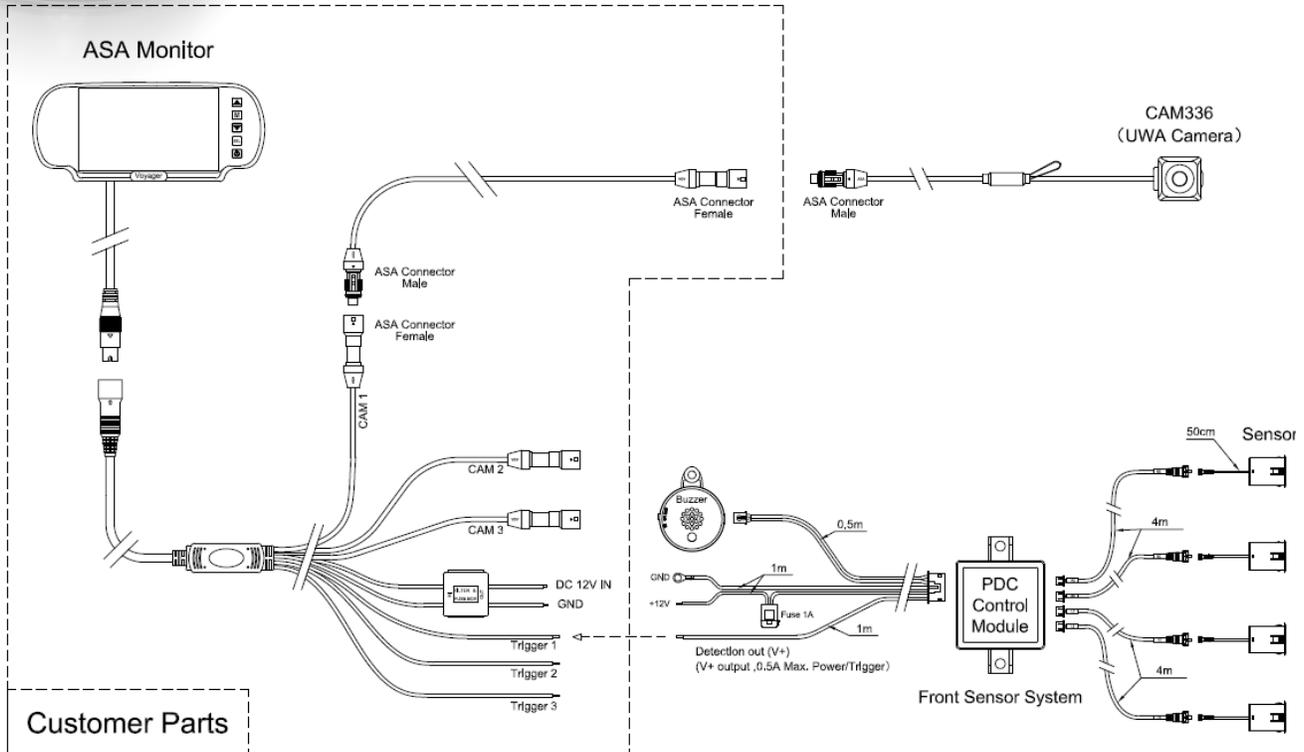

Specifications

General Specifications

Power System	12 VDC	
Operating Voltage Range	10V to 16V	
Current Draw @ 12V	100 mA	
PDC Module		
Operating Temperature Range	-4°F to 149°F	-20°C to 65°C
Storage Temperature Range	-22°F to 158°F	-30°C to 70°C
Maximum Relative Humidity	85%	
Overall Dimensions (PDC Module)	94mm(W) x 65mm(D) x 25mm(H)	
Product Weight (unpackaged)	0.120 lbs.	
Camera		
Operating Temperature Range	-22°F to 185°F	-30°C to 85°C
Storage Temperature Range	-22°F to 185°F	-30°C to 85°C
Maximum Relative Humidity	85%	
Product Weight (unpackaged)	0.190 lbs.	
Water proof rating	IPX6	
View angle	150(H) x 100 (V)	