




DESIGNED TO MOVE [YOU]®

2-Channel, Bluetooth® Amplifier [JAHD240BT]

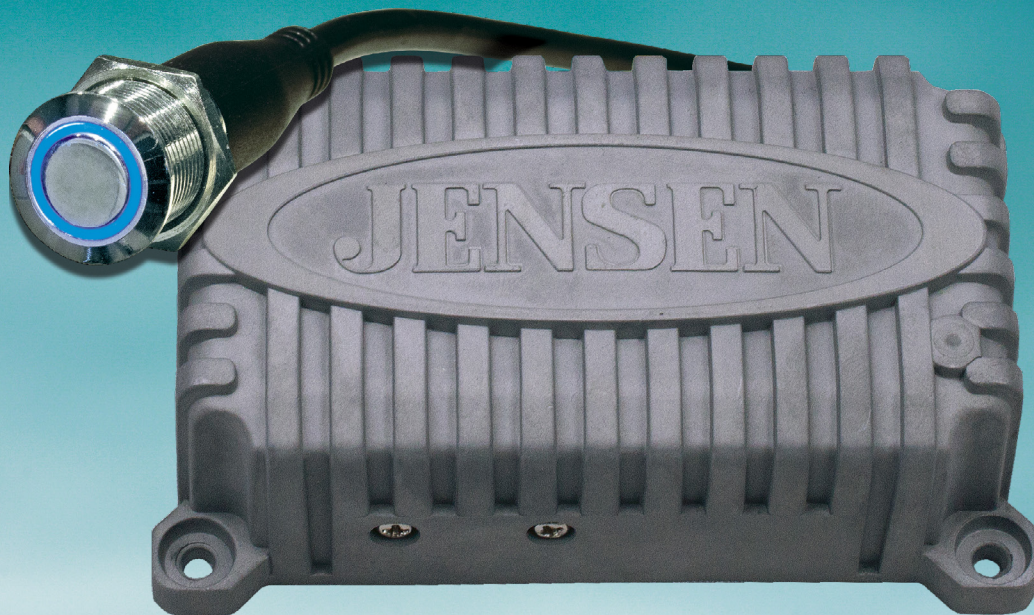

KEY FEATURES:

- 80 watt max power (40 watt RMS)
- Bluetooth® audio (A2DP)
- Waterproof (IPX6)
- 4 Ohm ~ 8 Ohm stable
- Operating voltage: 10 - 18VDC
- Frequency response: 20 Hz - 20KHz
- Flush mount lighted chrome switch
- Epoxy potted enclosure
- 10 Amp fuse in waterproof holder
- Corrosion resistant (ASTM B117)
- Meets ASTM D4329 UV exposure




MARINE CERTIFIED

asa
ELECTRONICS
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



2-Channel, Bluetooth® Amplifier

JAHD240BT

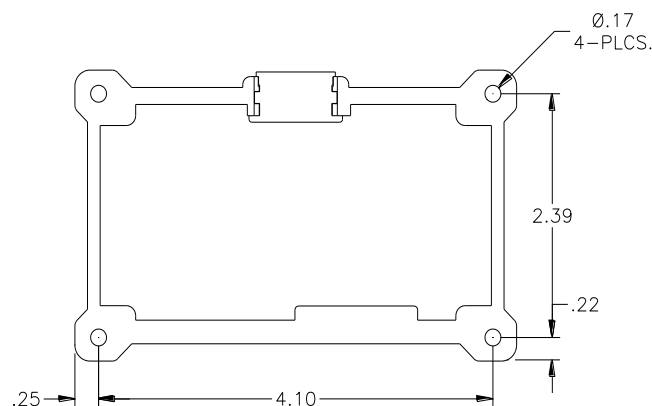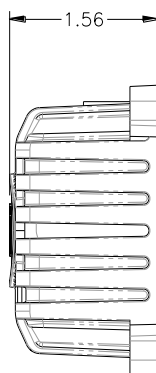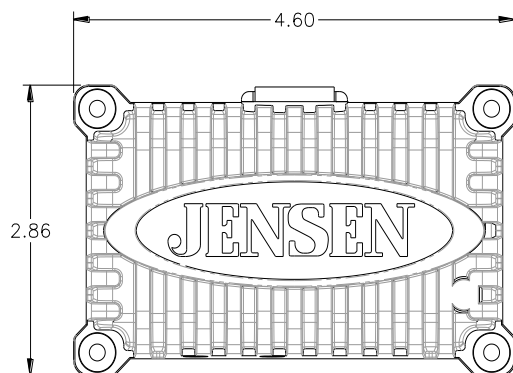

Specifications

General Specifications

Power System		12V DC
Operating Voltage Range		10V to 16V
Current Draw @ 12V	Idle	1 mA
	Nominal	2.6 A
	Maximum	5.0 A
Operating Temperature Range		-22°F to 185°F -30°C to 85°C
Storage Temperature Range		-40°F to 185°F -40°C to 85°C
Maximum Relative Humidity		100%
Product Weight (unpackaged)		1.5 lb
Output Power RMS		2 x 20Watts
Output Power Maximum		2 x 40Watts
Total Harmonic Distortion (1W @ 1Khz)		0.5%
Applied Test Suite Environ/ Electrical		ASA ES0013
Regulatory Certification		FCC, CE, Bluetooth, E-Mark, UL60065