



AM|FM|CD Stereo
JBR550



PRODUCT FEATURES

- Maximum power output: 160 watts (40W x 4)
- Front 3.5 mm AUX input
- CD player with 40 second Electronic Skip Protection (ESP)
- CD player functions: Intro, Repeat, Random
- Single disc CD/CDR/CDRW playback
- Selectable electronic AM/FM (US tuner only)
- Electronic control for volume/Bass/Treble/Balance/Fader
- Time/frequency display selector (T/F)
- Manual up/down and seek tuning
- Integrated PA microphone input
- Rear AUX audio input (RCA left/right)
- Large, user friendly controls and buttons
- Positive LCD display
- Fixed front face
- Built-in clock
- Mute



asa
ELECTRONICS
2802 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

DESIGNED TO MOVE [YOU]TM



AM|FM|CD Stereo

JBR550

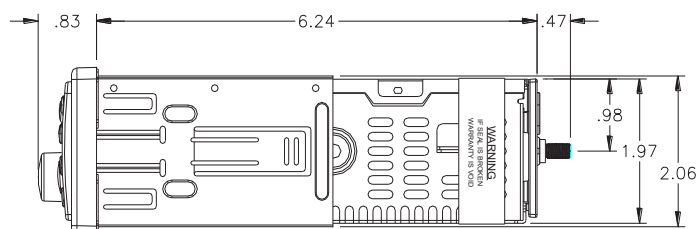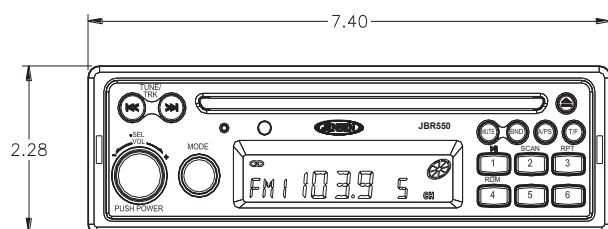

Specifications

General Specifications

Power System		12 VDC
Operating Voltage Range		10 V to 16 V
Current Draw @ 12V	Idle	1.3 mA
	Nominal	0.822 A
	Maximum	8.40 A
Operating Temperature Range		-4°F to 149°F -20°C to 65°C
Storage Temperature Range		-22°F to 158°F -30°C to 70°C
Maximum Relative Humidity		95%
Overall Dimensions		7.5" L x 7.4" W x 2.3"H
Product Weight (unpackaged)		3.5 lbs.

Performance Specifications

FM Sensitivity		5 uV
AM Sensitivity		50 uV
CD Frequency Response		20 Hz to 20 kHz
CD Signal to Noise		>70 dB
CD Skip Threshold (Random Freq. Profile)		1.5 g
Compatible CD Formats		Audio CD, CD-R, R/W
Output Power	RMS	4 x 15 W
	Maximum	4 x 40 W
Total Harmonic Distortion @ 1 Watt		<1%
Applied Test Suite		ASA ES0001
Regulatory Certifications		FCC Part 15B