



# AM/FM/CD Stereo JCD2010



## PRODUCT FEATURES

- 4x40W Output power
- Euro-DIN (sleeve-mount) chassis design
- Amber LED illumination
- Electronic AM/FM tuner (US/ Euro)
- Station presets (18FM, 12AM)
- Auto-Store (AS)
- Preset Scan (PS)
- Single CD player (CD-R/RW compatible)
- 40 Second CD ESP (Electronic Skip Protection)
- CD Track Pause/ Repeat/ Intro and Random play features
- Preset Equalizer (Classical, Rock, Pop, User settings)
- Stereo Aux audio input (3.5mm Front jack)
- Rotary encoder volume control
- 3-Wire power (ACC, Batt, Gnd)
- Clock
- Audio mute,
- Loudness

DESIGNED TO MOVE [YOU]<sup>TM</sup>



Features and specifications subject to change without notice.

**asa**  
ELECTRONICS<sup>TM</sup>  
2602 Marina Drive • Elkhart, IN 46514  
[www.asaelectronics.com](http://www.asaelectronics.com)



AM/FM/CD Stereo

# JCD2010

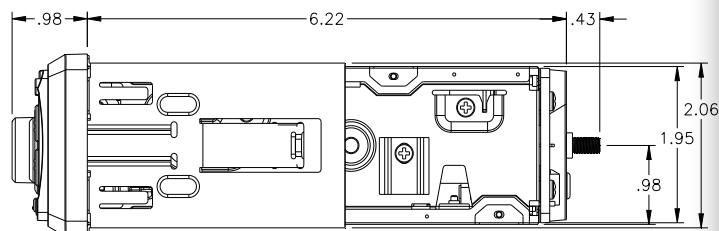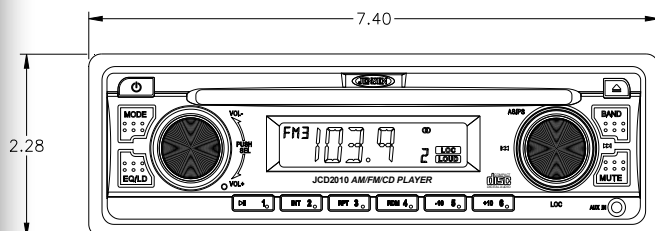

## Specifications:

### General Specifications

Power System		12VDC
Operating Voltage Range		10-18 VDC
Current Draw @ 12V	Idle	9 mA
	Nominal	1.0 A
	Maximum	10 A
Operating Temperature Range		-20C to +65C      -4°F to 149°F
Storage Temperature Range		-30C to +70C      -22°F to 158°F
Maximum Relative Humidity		95%
Overall Dimensions		6.65" x 2.1" x 7.40"
Product Weight (unpacked)		3 lbs

### Performance Specifications

FM Sensitivity		2 uV
AM Sensitivity		25 uV
CD Frequency Response		20 Hz – 20 kHz
CD Signal to Noise		>65 dB
CD Skip Threshold (Random Freq. Profile)		1.0 g
Compatible CD Formats		CD-A, CD-R, CD-RW
Output Power	RMS	22.5W x 4Ch
	Maximum	40W x 4Ch
Total Harmonic Distortion @ 1 Watt		<1%
Applied Test Suite		ASA ES0001
Regulatory Certification		FCC Part 15B