



15" LCD Bus Monitor

# JE1569BVM



## PRODUCT FEATURES


- 12 or 24 VDC Power
- 15" (16:9) LCD widescreen monitor
- White LED illumination
- 1 video NTSC/PAL input (RCA type)
- Auto On (video detection)
- Simple "Hook & Latch" installation design
- Injection molded housing
- LCD protective lens

DESIGNED TO MOVE [YOU]<sup>™</sup>

**asa**  
ELECTRONICS<sup>™</sup>  
2602 Marina Drive • Elkhart, IN 46514  
[www.asaelectronics.com](http://www.asaelectronics.com)



# 15" LCD Bus Monitor JE1569BVM

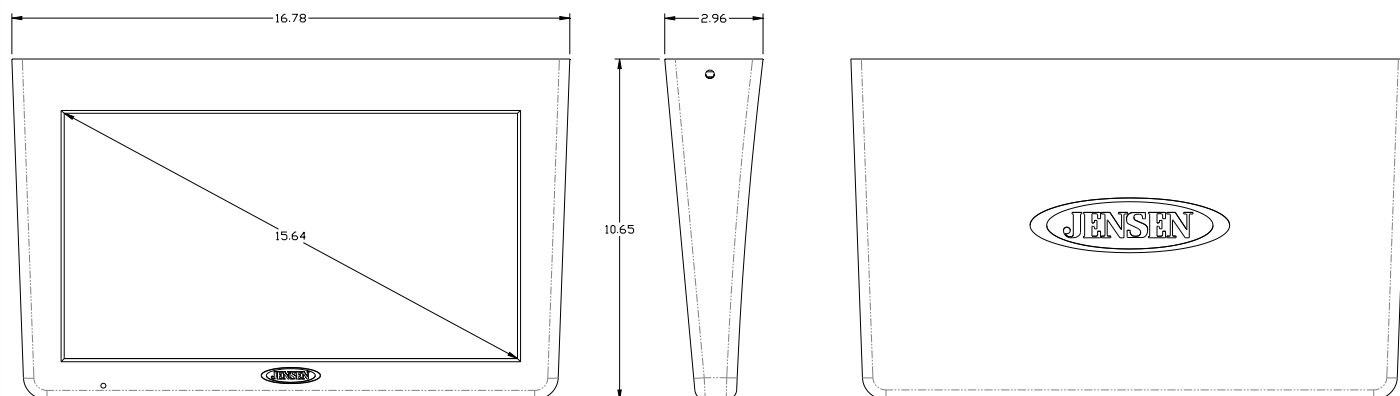

## General Specifications

Power System		12 or 24VDC
Operating Voltage Range - DC		10 - 28 VDC
Current Draw @ 12VDC	Idle	TBD mA
	Nominal	TBD mA
	Maximum	TBDA
Operating Temperature Range		-4° F to 149° F °-20C to °65C
Storage Temperature Range		-22° F to 176°F °-30C to °70C
Maximum Relative Humidity		85%
Overall Dimensions		"W x "H x "D
Product Weight (unpacked)		TBD lbs

## Performance Specifications

Video / Display System		NTSC/ PAL
Video Input Signal (Composite)		1Vp-p
Audio Output		N/A
LCD Specifications	Diagonal Size	15.6"
	Resolution	1366 x 768
	Brightness	220 nit
	Contrast Ratio	650:1
	View Angles	Top 20°
		Bottom 45°
		Left 45°
		Right 45°
	Display Format	16:9
	Response Time	Rise 3 ms
		Fall 8 ms
	Backlight Type	LED