



AM/FM/USB/iPod & Phone/ WB/SiriusXM Ready Stereo

JHD1635BT



PRODUCT FEATURES

- 12V DC power
- 180 watts max power output (45W x 4)
- Bluetooth® streaming audio and controls (A2DP/AVRCP) with hands-free calling (HFP)
- Electronic AM/FM tuner (US/Euro)
- iPod®/iPhone® ready via USB
- SiriusXM-Ready®
- Seven-channel NOAA weatherband with S.A.M.E. technology
- USB 2.0 for playback of MP3 & WMA audio files
- RBDS with PTY search
- Front and rear USB input
- Front and rear AUX input
- Pre-amp out (RCA)
- 12/24 hour selectable clock with Super-Cap 30-day power backup
- Beep tone confirmation (can be turned off)
- EQ presets (Flat/Rock/Pop/Classical/Custom)
- Low battery alert (voltage < 10.8 VDC)
- IR remote control ready (sold separately)
- Wired remote control ready (JHDHBC sold separately)
- Conformal coated PCB
- Non-volatile memory
- Preset tuning
- Channel lock



Optional USB and 1/8" AUX input interface cable



Included:

JMICHFP Omnidirectional Microphone

Works with all JENSEN® Heavy Duty Bluetooth®-enabled stereos

DESIGNED TO MOVE [YOU]™

Features and specifications subject to change without notice.



asa
ELECTRONICS™

2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



AM/FM/WB/iPod & iPhone/USB/SiriusXM Ready Stereo

JHD1635BT

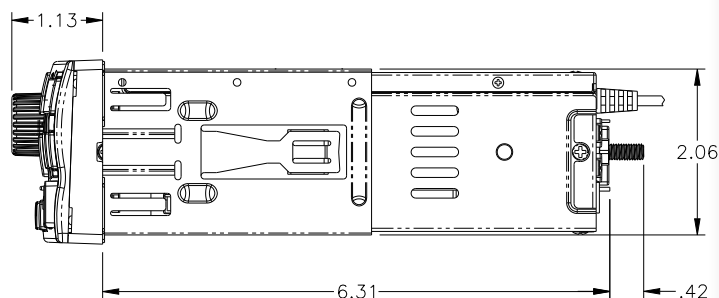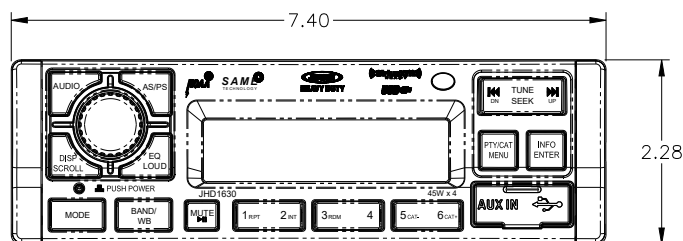

Specifications

General Specifications

Power System		12 VDC
Operating Voltage Range		9 V to 18 V
Current Draw @ 12V	Standby	0 A
	Nominal	2.0 A
	Maximum	10 A
Operating Temperature Range		-22°F to 185°F -30°C to 85°C
Storage Temperature Range		-40°F to 185°F -40°C to 85°C
Maximum Relative Humidity		95%
Overall Dimensions		6.3" x 7.4" x 2.1"
Product Weight (unpacked)		2.5 lbs.

Performance Specifications

FM Sensitivity		2.2 uV
AM Sensitivity		20 uV
Output Power	RMS	20 W x 4
	Maximum	45 W x 4
Total Harmonic Distortion @ 1 Watt		1%
Applied Test Suite		ASA ES0013
Regulatory Certification		FCC Part 15B / E-Mark