



Universal PA Amplifier

JPA600



PRODUCT FEATURES


- 2 Wire - 12VDC switched power
- 4 Channel Audio Amplifier with Public Address (PA)
- Universal harness leads
- Compatible with JMICHND for volume control instead of integrated volume knob
- 4 Ohm ~ 8 Ohm Stable
- Frequency Response 100Hz ~ 10KHz
- 10 Amp Fuse in holder
- Universal PA, works with any 4 channel stereo or standalone.
- Installation: In-line between existing stereo & speakers
- Automatically interrupts stereo audio when mic is keyed
- Dimensions: 3.0"W x 1.9"H x 4.0"D

DESIGNED TO MOVE [YOU]TM

asa
ELECTRONICS.
2802 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



Universal PA Amplifier JPA600

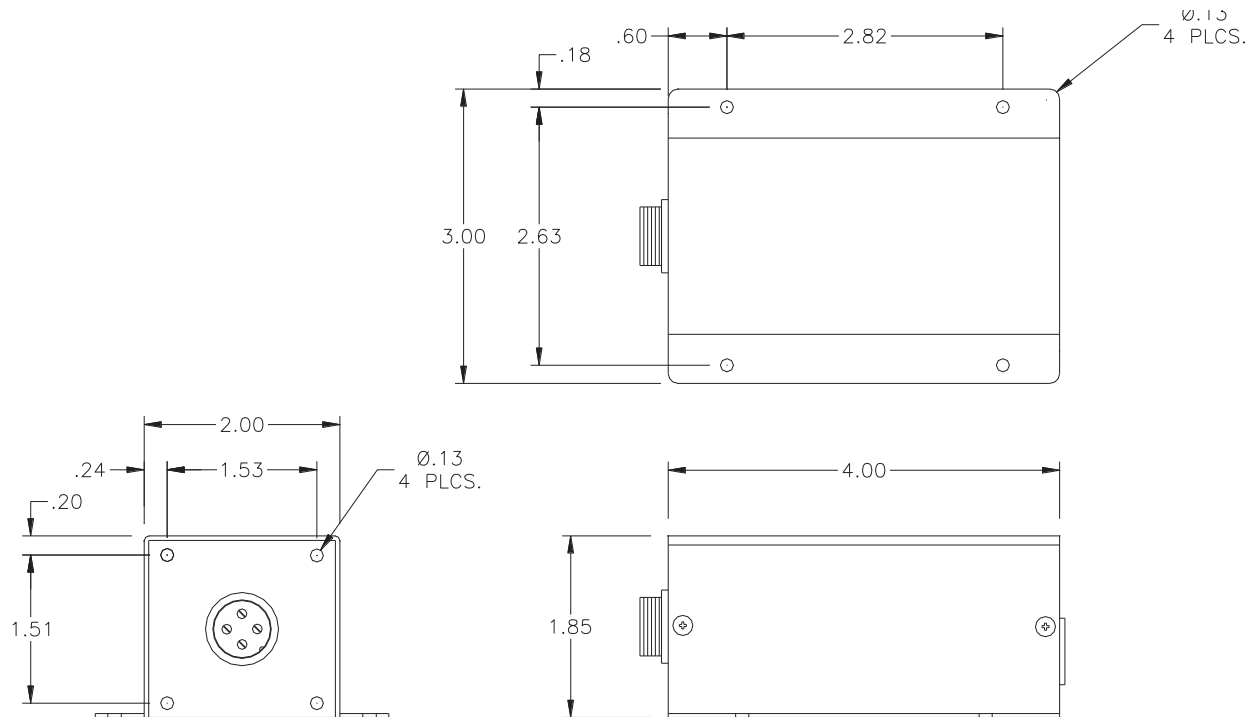

Specifications

General Specifications

Power System		12V DC
Operating Voltage Range		10V to 18V
Current Draw @ 12V	Idle	380 mA
	Nominal	2.6 A
	Maximum	9.0 A
Operating Temperature Range		-4°F to 149°F -20°C to 65°C
Storage Temperature Range		-25°F to 185°F -30°C to 70°C
Maximum Relative Humidity		N/A
Product Weight (unpackaged)		1.0 lb
Output Power RMS		4 x 18Watts
Output Power Maximum		4 x 25Watts
Total Harmonic Distortion (1W @ 1Khz)		0.5%
Applied Test Suite Environ/ Electrical		ASA ES0001