



DVD | USB | AUX | HDMI | App Ready
Bluetooth® Wallmount Stereo

JWM6A



App Ready

PRODUCT FEATURES

- jControl app lets you control all primary functions of your stereo from your Bluetooth-enabled phone or tablet
- Bluetooth streaming audio (A2DP) and controls (AVRCP)
- 18 FM and 12 AM station presets
- Front USB input for full iPod/iPhone control and charging
- Front audio auxiliary input
- DVD plays CD/CD-R/CD-RW/DVD/DVD+R/DVD RW/DVD-R/DVD-RW/MP3
- jCOM HDMI interface with all JENSEN TVs automatically detects DVDs, simplifying operation
- HDMI output
- Three speaker zones
- Clock with alarm/sleep-timer


DESIGNED TO MOVE [YOU]™

asa
ELECTRONICS™
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



DVD | USB | AUX | HDMI | App Ready
Bluetooth® Wallmount Stereo

JWM6A

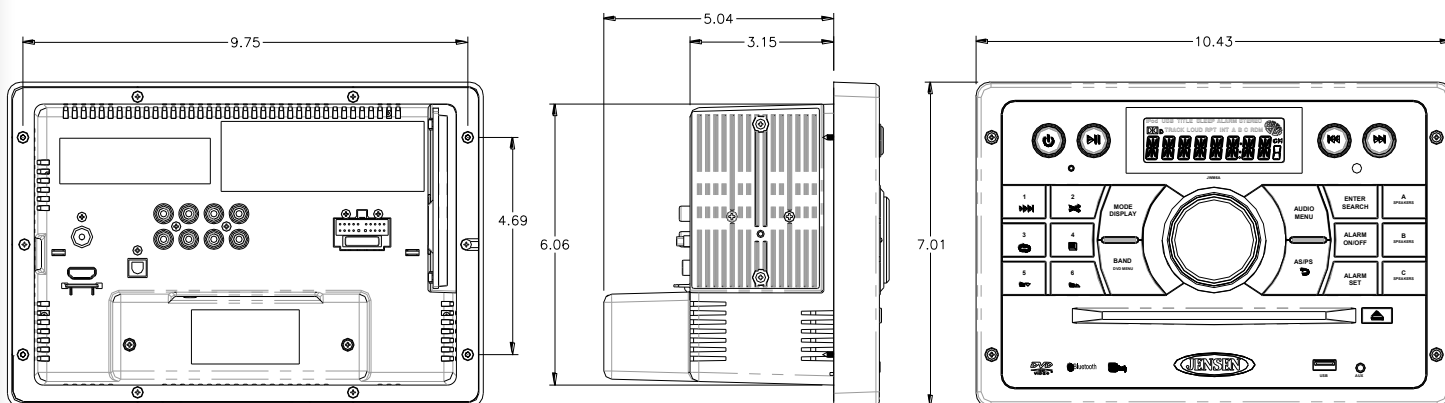

Features:

- 12 V DC Power
- Digital AM/FM Tuner/30 Preset stations (12 AM/18 FM)
- Auto-Store/Preset Scan
- Bluetooth Ready with A2DP/AVRCP Streaming Audio
- APP Ready (jControl)
- Pre-set Equalizer - 5 settings (User > Flat > Pop > Classical > Rock)
- Electronic Bass, Treble, Balance and Fader Controls
- Skip Protected Disc Mechanism
- Slot type DVD/CD-R/RW and MP3 Compatible
- HDMI Video Output with JCOM link
- Low Battery Alarm
- Time/Alarm Clock
- White LED Backlight LCD
- 1/8" Front Auxiliary Audio Input
- Rear Audio RCA Inputs/Outputs
- USB Playback of MP3/WMA Files
- Made for iPod/iPhone (USB Input)
- 3 Zone / 8 Speaker Output
- Wireless Remote Control Included
- RCA Video Output
- RCA Coaxial Input
- Optical Input

Specifications

General Specifications

Power System	12 V DC (2-Wire)	
Operating Voltage Range	10 V to 16 V	
Current Draw @ 12V	Idle	112 mA
	Nominal	.5A
	Maximum	6 A
Operating Temperature Range	-4°F to 149°F	-20°C to 65°C
Storage Temperature Range	-22°F to 158°F	-30°C to 70°C
Maximum Relative Humidity	95%	
Overall Package Dimensions	10 7/16" L x 7" W x 5" H	
Product Weight (unpackaged)	3.5 lbs.	

Performance Specifications

FM Sensitivity	2 uV	
AM Sensitivity	15 uV	
CD Frequency Response	20 Hz to 20 kHz	
CD Signal to Noise	73 dB	
CD Skip Threshold (Random Freq. Profile)	1.6 g	
Compatible CD Formats	CD, CD-R, R/W, MP3, DVD, DVD+- RW	
Output Power	RMS	5.8W x 8
	Maximum	50 W
Total Harmonic Distortion	1%	
Applied Test Suite	ASA ES0001	
Regulatory Certifications	FCC Part 15B	