



DVD|USB|AUX|HDMI|App Ready  
Bluetooth® Wallmount Stereo

# JWM70A



## PRODUCT FEATURES


- App Ready - Control all primary functions of stereo from most Bluetooth-enabled devices with JENSEN jControl app
- Bluetooth streaming audio (A2DP) and controls (AVRCP)
- iPod/iPhone ready (via Bluetooth)
- Front USB supports playback of MP3 and WMA and 1 amp charging
- Plays CD/CD-R/CD-RW/DVD/DVD+R/DVD RW/DVD-R/DVD-RW/MP3
- jCOM HDMI interface with all JENSEN TVs automatically detects DVDs, simplifying operation
- 18 FM and 12 AM station presets
- Three Speaker zones (A/B/C) with independent volume control
- Eight speaker outputs (8 x 6W RMS; 4 ohm)
- A/V AUX input (front-3.5 mm)
- Audio AUX input (rear-RCA)
- Fixed RCA output and variable RCA output (rear)
- Two video outputs (HDMI, RCA)
- White LED backlit controls and LCD panel with 10 dimming levels
- Clock with alarm/sleep-timer

DESIGNED TO MOVE [YOU]<sup>TM</sup>

**asa**  
ELECTRONICS<sup>TM</sup>  
2602 Marina Drive • Elkhart, IN 46514  
[www.asaelectronics.com](http://www.asaelectronics.com)



# JWM70A

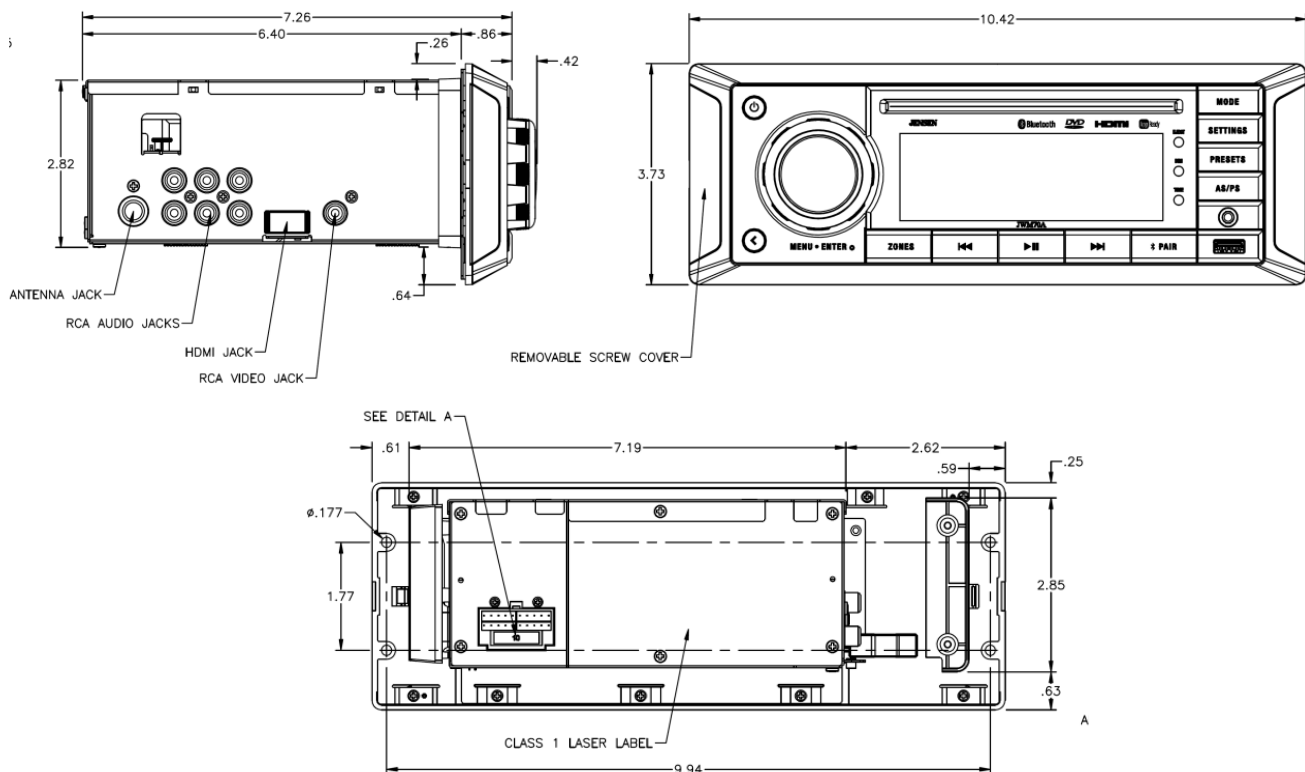

## Specifications

|   |                  |  |
|---|------------------|--|
| <b>Power System</b>                             |                  | <b>12 V DC (2-Wire)</b>                |
| <b>Operating Voltage Range</b>                  |                  | <b>10 V to 16 V</b>                    |
| <b>Current Draw @ 12V</b>                       | <b>Quiescent</b> | <b>0 mA</b>                            |
|   | <b>Standby</b>   | <b>115 mA</b>                          |
|   | <b>Maximum</b>   | <b>6.0 A</b>                           |
| <b>Operating Temperature Range</b>              |                  | <b>-4°F to 149°F    -20°C to 65°C</b>  |
| <b>Storage Temperature Range</b>                |                  | <b>-22°F to 158°F    -30°C to 70°C</b> |
| <b>Maximum Relative Humidity</b>                |                  | <b>95%</b>                             |
| <b>Overall Package Dimensions</b>               |                  | <b>10.4"W x 3.75"H x 6.5"D</b>         |
| <b>Product Weight (unpackaged)</b>              |                  | <b>5 lbs.</b>                          |
| <b>Performance Specifications</b>               |                  |  |
| <b>FM Sensitivity</b>                           |                  | <b>2 uV</b>                            |
| <b>AM Sensitivity</b>                           |                  | <b>15 uV</b>                           |
| <b>CD Frequency Response</b>                    |                  | <b>20Hz to 20kHz</b>                   |
| <b>CD Signal to Noise</b>                       |                  | <b>79 dB</b>                           |
| <b>CD Skip Threshold (Random Freq. Profile)</b> |                  | <b>3 seconds buffer</b>                |
| <b>Speaker Level Power Output</b>               |                  | <b>8 x 6Wrms</b>                       |
| <b>Maximum Output Power</b>                     |                  | <b>50 Watts Total</b>                  |
| <b>Total Harmonic Distortion</b>                |                  | <b>1 %</b>                             |
| <b>Applied Test Suite</b>                       |                  | <b>ASA ES0001</b>                      |
| <b>Regulatory Certifications</b>                |                  | <b>FCC Part 15B, BT, Apple</b>         |