



DVD | USB | AUX | HDMI | App Ready
Bluetooth® Wallmount Stereo

JWM9A



App Ready

PRODUCT FEATURES

- jControl app lets you control all primary functions of your stereo from your Bluetooth-enabled smart phone or tablet
- Industry-first wallmount stereo with all-digital connectivity
- Industry-first wallmount stereo with Apple control USB
- DVD player with HDMI output featuring 1080i upscaling
- 160 watts max (20W x 8)
- Bluetooth® streaming audio
- Multi-preset AM/FM tuner
- Selectable line audio output
- Digital audio input
- Weatherband and alert
- Low battery warning
- Three speaker zones
- Remote control included
- 12 volt power



DESIGNED TO MOVE [YOU]™


asa
ELECTRONICS™

2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

JENSEN®


DVD | USB | AUX | HDMI | App Ready
Bluetooth® Wallmount Stereo

JWM9A

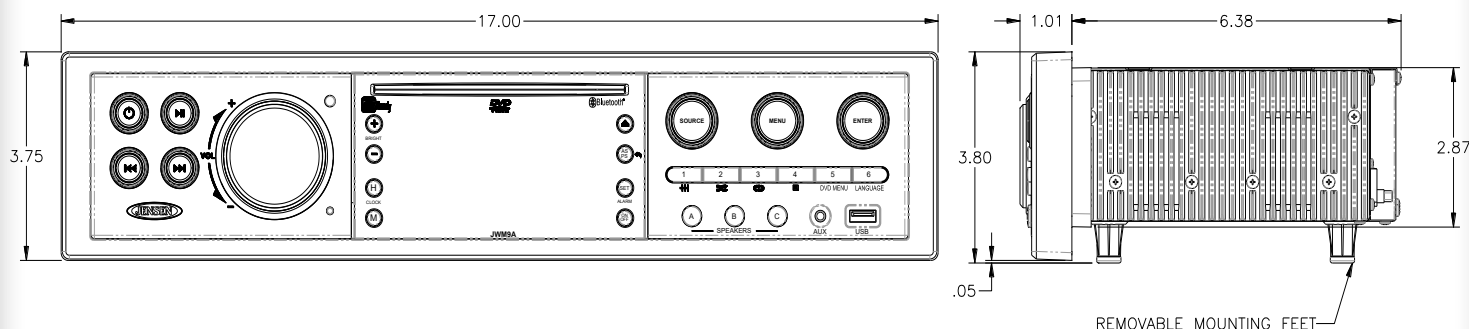

Features:

- 2-Wire (GND/ +12VDC Switched) Power System
- Slot-Type DVD/ CD Deck Mechanism
- AM/FM Electronic Tuner (US/Euro)
- 30 Programmable Station Presets (18FM, 12AM)
- Auto-Store/Preset Scan
- NOAA Weather Band with Alert
- Receives Bluetooth audio (A2DP) and controls (AVRCP) from BT enabled source
- Clock with Sleep Timer and Alarm
- White LED Backlit Controls and LCD Display
- User Selectable Dimming Display (Power Off)
- 1 - Front Aux A/V Input (3.5mm jack)
- 1 - Rear Aux Audio input (RCA Jacks)
- Digital Audio Input (1- Coaxial; 1- Optical)
- Front USB support playback MP3 /WMA/ JPEG format
- iPod/ iPhone Ready via USB for Controls and Charging
- 1 - HDMI with CEC video output 720P/ 1080i source resolution
- 1 - Rear Selectable Fixed/ Variable line level Audio output (RCA Jacks)
- 160W Total – 3-Zone Audio Output
- Removable, threaded mounting feet for shelf
- Wireless Remote Included
- App Ready

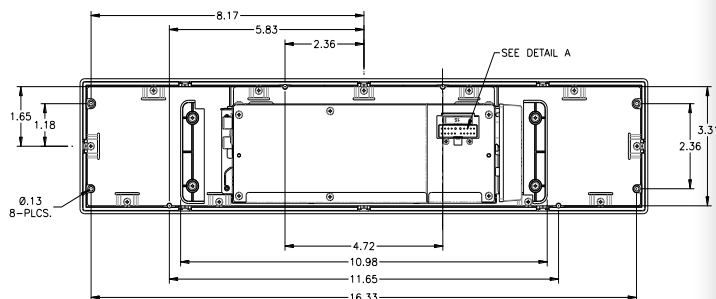

Specifications

General Specifications

Power System	12 V DC (2-Wire)	
Operating Voltage Range	10 V to 16 V	
Current Draw @ 12V	Idle	0 mA
	Nominal	40 mA
	Maximum	17.0 A
Operating Temperature Range	-4°F to 149°F	-20°C to 65°C
Storage Temperature Range	-22°F to 158°F	-30°C to 70°C
Maximum Relative Humidity	95%	
Overall Package Dimensions	17"W x 3.75"H x 7"D	
Product Weight (unpackaged)	5 lbs. oz.	

Performance Specifications

FM Sensitivity	2 uV
AM Sensitivity	15 uV
CD Frequency Response	20Hz to 20kHz
CD Signal to Noise	79 dB
CD Skip Threshold (Random Freq. Profile)	1.6 g
Compatible CD Formats	CD, CD-R, CD R/W, MP3, DVD, DVD +/- RW
Maximum Output Power	8 x 20W Total
Total Harmonic Distortion	1 %
Applied Test Suite	ASA ES0001
Regulatory Certifications	FCC Part 15B, BT, Apple