



High-Performance 3" 2-Way Speaker
JXHD30HPC



PRODUCT FEATURES

- Max handling power: 60 watts
- RMS power: 30 watts
- Waterproof bridged woofer/tweeter
- Ferro fluid cooling on tweeter
- Polypropylene cone
- Rubber suspension/surround
- Four-layer ASV voice coil
- Ferro fluid cooling on tweeter
- Fixed grille
- Removable tuned rear enclosure
- Threaded nut mounting solution for low-profile applications
- Corrosion resistant (D1141 - 98 compliant)
- UV resistant (ATSM D4329 compliant)

DESIGNED TO MOVE [YOU]TM

asa
ELECTRONICS


2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

Features and specifications subject to change without notice.



High-Performance 3" 2-Way Speaker

JXHD30HPC

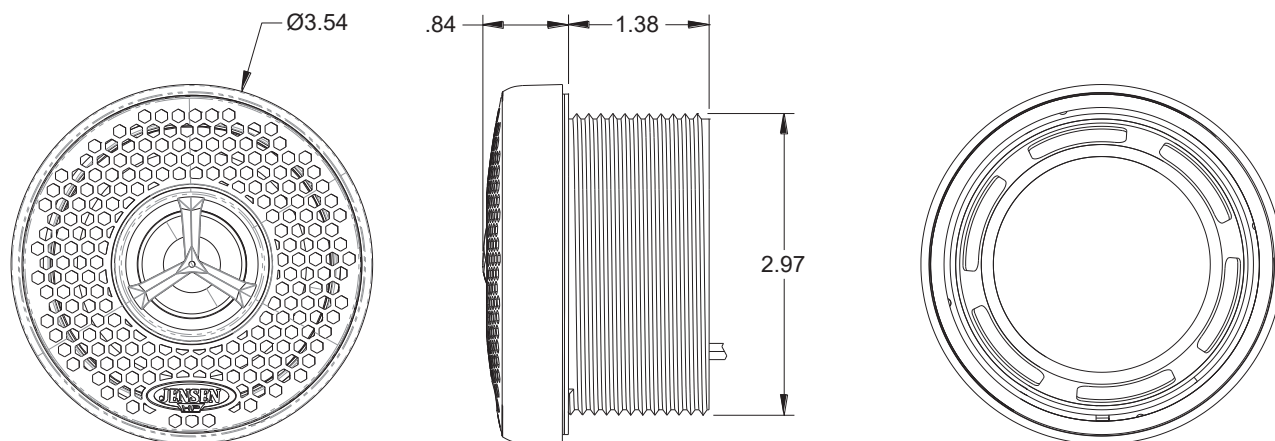

Specifications:

General Specifications:

Woofer Size	3"	
Woofer Material	Poly-propylene	
Tweeter Type	Dome	
Tweeter Material	Silk / Neodymium Magnet	
Voice Coil Size	0.75"	
Magnet Weight	4.2 oz	
Mounting Depth	3.3"	
Hole Size	3"	
Impedance	4 Ω	
Temperature Range	-30°C - 70°C	-22°F - 158°F
Max RH	100%	
Terminal Size	Positive - 0.205"	Negative - 0.110"

Performance Specifications:

Frequency Response	90 Hz – 20 KHz
RMS Power Range	30 W
Max Power	60 W
SPL @ 1 W/ 1 M	83 dB
Resonant Frequency	150 Hz