



5.2" Heavy Duty Sealed Speaker with Grille

JXHD54



PRODUCT FEATURES

- Max power handling: 135 watts
- RMS power: 20-45 watts
- Sensitivity: 84dB
- Frequency: 65Hz - 20kHz
- Nominal impedance: 4 Ohms
- Polypropylene woofer: 5"
- Magnet: 11 oz.
- Mounting hole diameter: 5"
- Mounting depth: 2.3"
- Tweeter type: Dome
- Tweeter material: Mylar cone/Neodymium magnet




DESIGNED TO MOVE [YOU][™]

asa
ELECTRONICS[™]
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



5.2" Heavy Duty Sealed Speaker with Grille

JXHD54

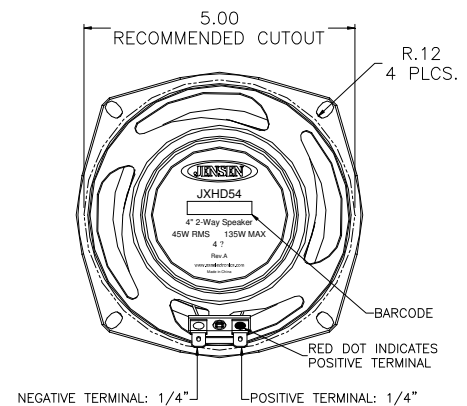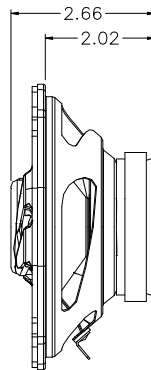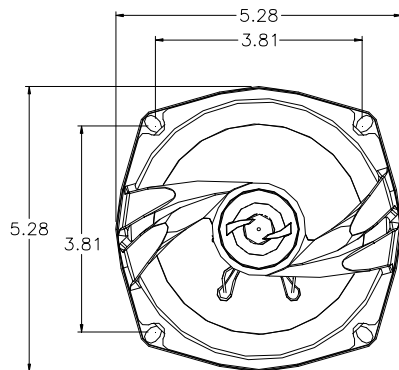

General Specifications:

Woofer Size	5"	
Woofer Material	Poly-propylene	
Tweeter Type	Dome	
Tweeter Material	Mylar Cone / Neodymium Magnet	
Voice Coil Size	1"	
Magnet Weight	11oz	
Mounting Depth	2.3"	
Hole Size	5 "	
Impedance	4 Ω	
Temperature Range	-30°C - 70°C	-22°F - 158°F
Max RH	100%	
Terminal Size	Positive - 1/4"	Negative - 1/4"

Performance Specifications:

Frequency Response	65 Hz – 20 KHz
RMS Power Range	20 – 45 W
Max Power	135 W
SPL @ 1 W/ 1 M	84 dB
Resonant Frequency	100 Hz