



6.5" Coaxial Speaker

# MSX60RV



## PRODUCT FEATURES:


- 75 watts max power handling
- Sensitivity: 91dB
- Frequency: 65Hz - 20kHz
- Nominal impedance: 4 ohms
- 6.5" Polypropylene woofer
- 11 oz. magnet
- 5" Mounting hole diameter
- 2.3" Mounting depth
- Dome tweeter type, titanium tweeter material
- Corrosion resistant (ASTM B117)
- UV resistant (ASTM D4329)

DESIGNED TO MOVE [YOU]<sup>™</sup>

**asa**  
ELECTRONICS<sup>™</sup>  
2602 Marina Drive • Elkhart, IN 46514  
[www.asaelectronics.com](http://www.asaelectronics.com)



# 6.5" Coaxial Speaker MSX60RV

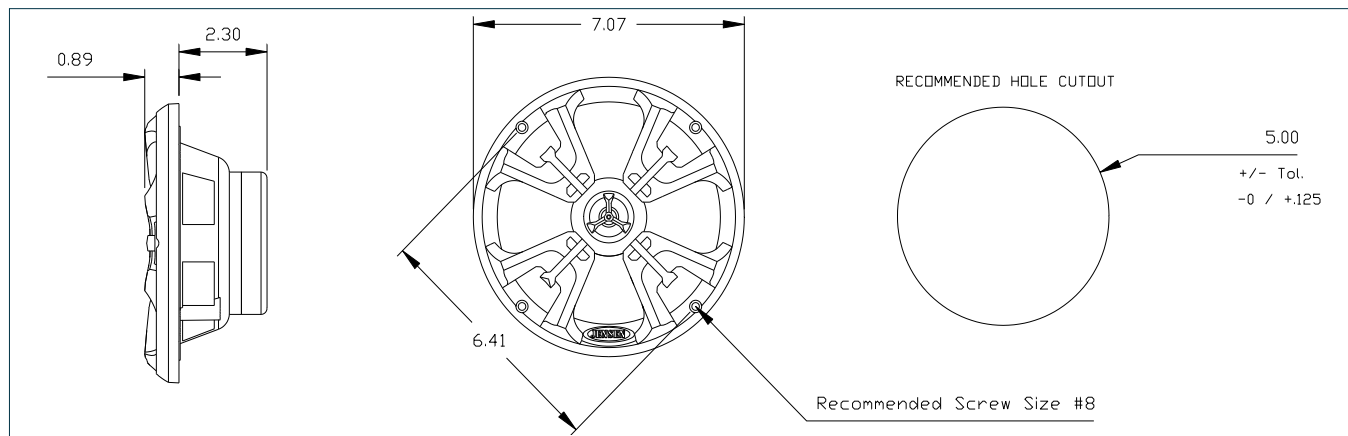

## **Specifications:**

### **General Specifications:**

Woofer Size	6.5"	
Woofer Material	Poly-propylene	
Tweeter Type	Standard	
Tweeter Material	Silk	
Voice Coil Size	1"	
Magnet Weight	11oz	
Mounting Depth	2.3"	
Hole Size	5"	
Impedance	4 Ohms	
Temperature Range	-30°C - 70°C	-22°F - 158°F
Max RH	100%	
Terminal Size	Positive - 1/4"	Negative - 1/4"

### **Performance Specifications:**

Frequency Response	65 Hz – 20 KHz
RMS Power Range	30W
Max Input Power	75W