

Voyager[®]

7" Heavy Duty LCD Monitor

UPSVOM718



PRODUCT FEATURES:




- High durability metal housing
- Dash mount compatible
- Three camera inputs
- Built-in speaker
- Backlit controls
- Energy Efficient White LED illumination
- 12V and 24V system compatible
- Dustproof
- NTSC and PAL video signal compatible
- Manual (pushbutton) or automatic (trigger) source selection
- Turn-signal (pulsed DC) compatible trigger inputs (AV2, AV3)
- Auto power on (standby)
- Day/Night brightness modes
- Non-volatile memory for picture and volume adjustment settings
- Anti-glare/Anti-scratch protective lens
- Removable sun-visor included

EXPAND your vision™

asa
ELECTRONICS™
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

Voyager®

7" Heavy Duty LCD Monitor UPSVOM718

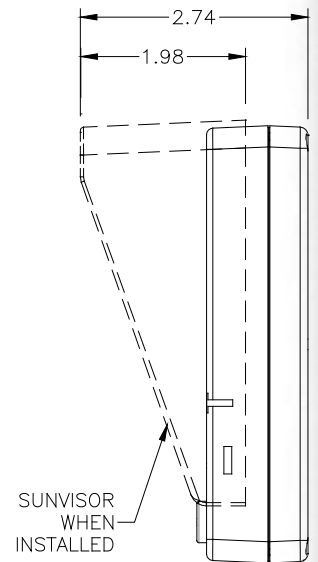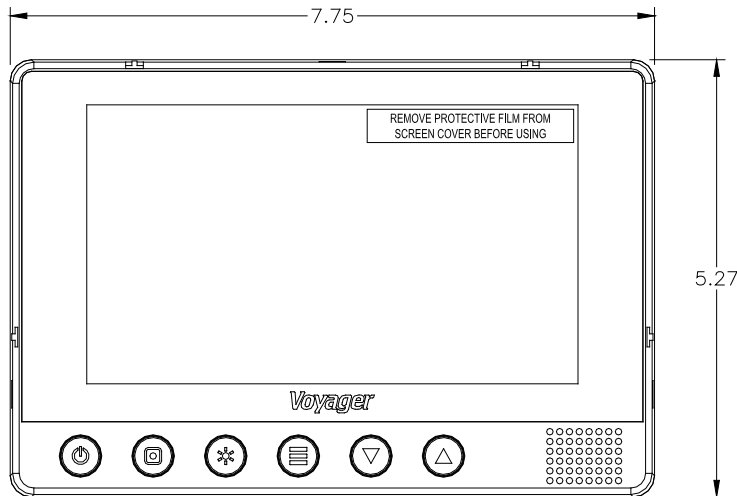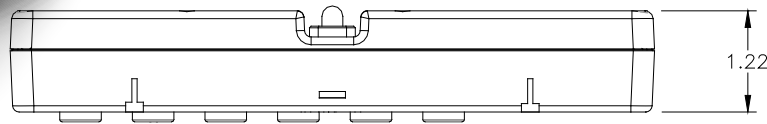

SPECIFICATIONS:

General Specifications:

Power System	12/24V DC	
Operating Voltage Range	10V to 32V	
Current Draw @ 12V with 4 cameras connected	Idle	126 mA
	Nominal	386 mA
	Maximum	662 mA
Operating Temperature Range	-40°F to 185°F	-40°C to 85°C
Storage Temperature Range	-40°F to 185°F	-40°C to 85°C
Maximum Relative Humidity	100%	
Overall Dimensions	7.76"(W) x 5.28"(H) x 1.22"(D)	
Product Weight (unpackaged)	2.72lbs	

Performance Specifications:

Video / Display System	NTSC/PAL		
Video Input Signal (Composite)	1V P-P @ 75Ω		
Audio Output	1W		
LCD Specifications	Diagonal Size	7"	
	Resolution	800 x 480	
	Contrast Ratio	500:1	
	View Angles	Top	50°
		Bottom	70°
		Left	70°
		Right	70°
	Display Format	16:9	
	Response Time	Rise	10ms
		Fall	15ms
Backlight Type	LED		
Backlight Life	50,000 Hours		

Features and specifications subject to change without notice.