

# Voyager®

Wireless Camera System Prewired for Power

## WVHS43



### PRODUCT FEATURES:

#### Monitor (WVOM43)

- Supports up to four wireless cameras (WVCMS130AP) and one wired Voyager camera simultaneously
- Auto-Pairing capability allows monitor to be paired with any of the (up to) four wireless cameras (WVCMS130AP) with the touch of a button
- Strong signal transmits through and around objects up to 60 feet away
- Bright, 4.3" display
- Compact size allows for easy storage in armrest, glovebox or center console when not in use
- Displays graphic overlay that shows real-time distance from objects while backing up
- Built-in speaker
- Suction cup mount and 12V DC plug included

#### Camera (WVH100)

- 12VDC
- High-performance color optics
- CMOS sensor
- IR LED low-light assist
- Waterproof
- Built-in microphone
- Wide-angle view



If this plate is on the back of your RV, you are

**PREWIRED  
FOR  
Voyager®**

NOTE: This system is **only** compatible with Voyager pre-wired vehicles.



EXPAND your vision™

**asa**  
ELECTRONICS®  
2602 Marina Drive • Elkhart, IN 46514  
[www.asaelectronics.com](http://www.asaelectronics.com)


# Voyager®

Wireless Camera System Prewired for Power


# WVHS43

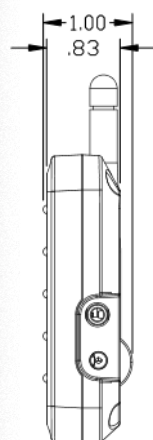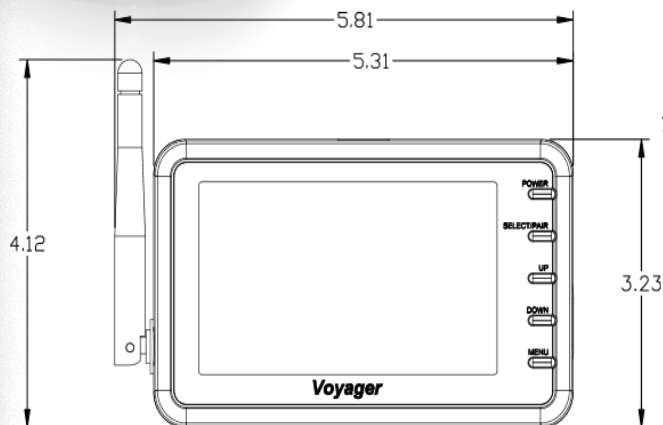

4 x  $\varnothing 0.33 \pm 0.31$   
 $\sqrt{\varnothing 0.33 \times 100^\circ}$

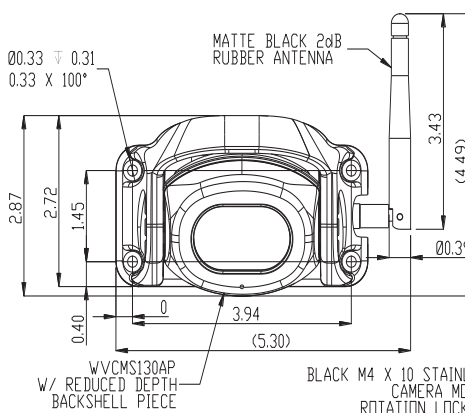


BLACK M4 X 10 STAINLESS STEEL  
 CAMERA MOUNTING AND  
 ROTATION LOCKING SCREWS

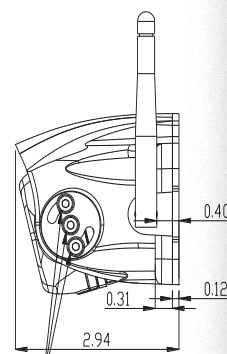

## Specifications

## MONITOR

Power System	12VDC
Operating Voltage Range	10 ~ 14V
Power Consumption (MAX)	340mA
Operating Temperature Range	-4°F to 149°F
Storage Temperature Range	-40°F to 185°F
Operating Relative Humidity	95%
Waterproof Rating	NA
Overall Dimensions	1.0"x 5.8" x 4.1"
Product Weight (unpacked)	6.5 oz
Video Output Signal Format	NTSC
Video Signal Level	1.0V p-p ; 75Ω
Audio	1.5 watt
Sensor	NA
Sensitivity	NA
Image Orientation	NA
Resolution	480 x 272
View Angles	140°(H) 120°(V)
Brightness	500 nit
Contrast Ratio	500:1
Response Time	10ms(ON) 15ms(OFF)
Display Format	16:9

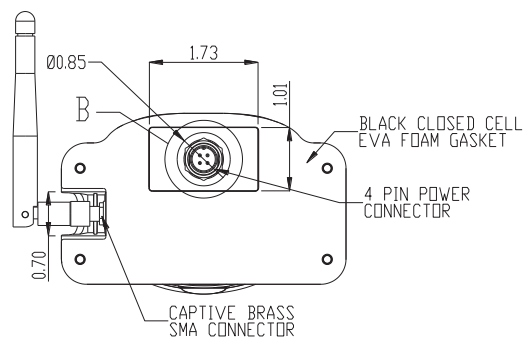

## Specifications

## CAMERA

Power System	12VDC
Operating Voltage Range	10 ~ 18V
Power Consumption (MAX)	230 mA
Operating Temperature Range	-20°C to 65°C
Storage Temperature Range	-30°C to 85°C
Operating Relative Humidity	100%
Waterproof Rating	IPX6
Overall Dimensions	5.52"x 3"x 2.82"
Product Weight (unpacked)	10.56 oz
Video Output Signal Format	NTSC
Video Signal Level	1.0V p-p ; 75Ω
Audio	Microphone
Sensor	1/3" CMOS
Sensitivity	0 Lux
Image Orientation	Mirror (Reversed)
Resolution	380 Lines
View Angles	135°(D) 102°(H) 72°(V)