

Voyager[®]

I-Camera Digital Wireless Observation System

WVOS5MDCL1B



PRODUCT FEATURES

- Easy installation, fits most applications
- 5.6" monitor comes with suction cup and 12V DC plug for easy portability
- Camera wires into rear lights or other 12V DC power source
- Strong signal transmits through and around objects up to 60 feet away
- Sharp, clear, uninterrupted picture



EXPAND your vision[™]

asa
ELECTRONICS

2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

Voyager®

1-Camera Digital Wireless Observation System WVOS5MDCL1B

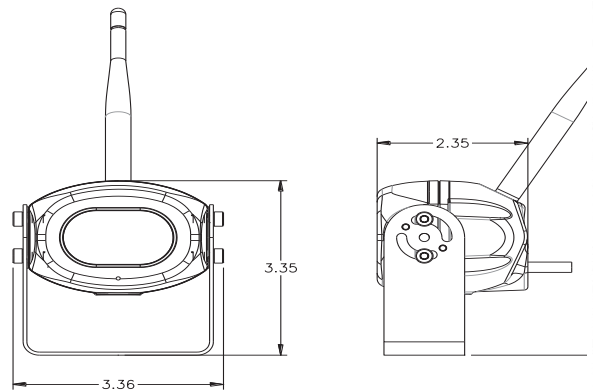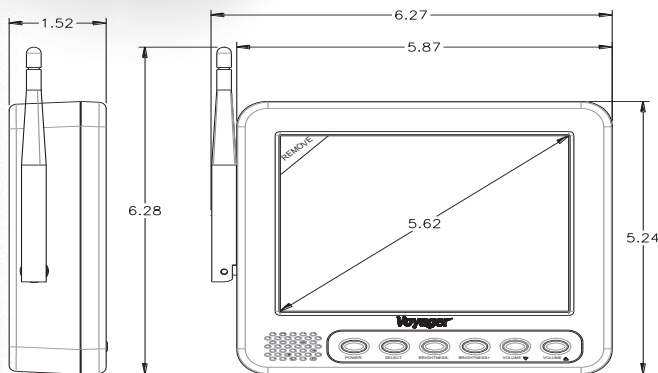

Specifications	CAMERA	MONITOR
Power System	12VDC	12VDC
Operating Voltage Range	10 ~14V	10 ~ 14V
Power Consumption (MAX)	351mA	630mA
Operating Temperature Range	-4°F to 149°F	-4°F to 149°F
Storage Temperature Range	-40°F to 185°F	-40°F to 185°F
Operating Relative Humidity	100%	95%
Waterproof Rating	IPX6	NA
Overall Dimensions	2.35"x3.35"x3.36"	1.5"x 5.2" x 6.3"
Product Weight (unpackaged)	12.32 oz	14 oz
Video Output Signal Format	NTSC	NTSC
Video Signal Level	1.0V p-p ; 75Ω	1.0V p-p ; 75Ω
Audio	Microphone	1.5 watt
Sensor	1/3" CMOS	NA
Sensitivity	0 Lux	NA
Image Orientation	Mirror (Reversed)	NA
Resolution	520 Lines	960(W) x 234(H)
View Angles	125°(D) 94°(H) 68°(V)	100°(H) 80°(V)
Brightness	NA	500 nit
Contrast Ratio	NA	250:1
Response Time	NA	30ms(R) 40ms(F)
Display Format	NA	4:3