

App Ready.



MARC100
Remote



KEY FEATURES

- Maximum power output: 160 watts (40W x 4)
- Waterproof (IPX5)
- Bluetooth interface capability (A2DP/AVRCP)
- iPod®/iPhone® ready (via USB)
- AM/FM electronic tuner
- Low battery warning
- Rear AUX input (RCA)
- Wired remote control capable (MARC100)
- Pre-amp line-out audio (RCA)
- EQ presets
- Conformal-coated circuit boards
- Standard DIN chassis
- Solid top chassis
- Regulatory certifications: FCC/CE/RoHS/C-TICK
- Complies with UL60065
- Corrosion resistant (ASTM B117)
- UV resistant (ASTM D4329)
- App control: compatible with both Apple & Android users



MAZOO

AM|FM|USB|Bluetooth®|Waterproof Stereo with App Control

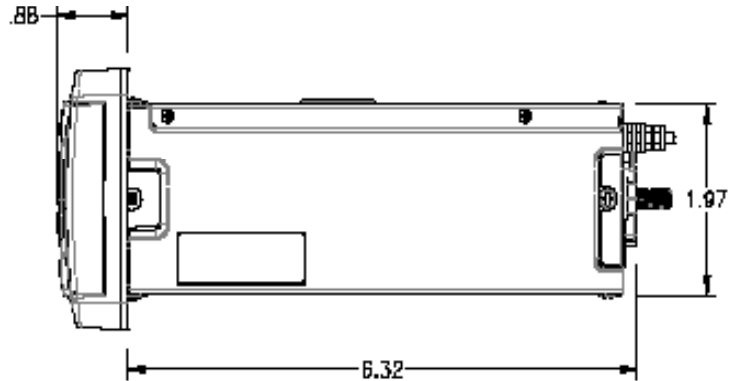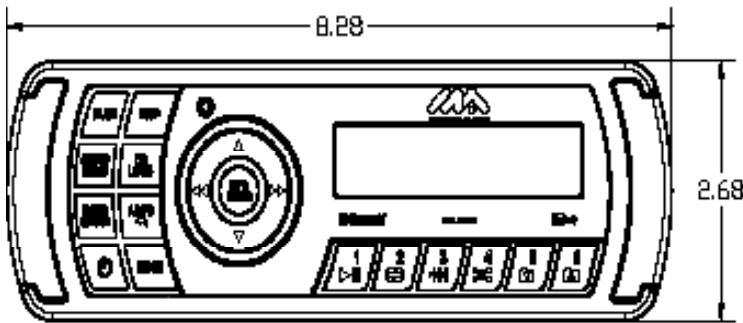

FEATURES:

- 12V DC Power System (2-Wire)
- 1 DIN Panel Mount Chassis (Mounting Screws not included)
- Waterproof (IPx5) Fixed Front Panel
- Non-Volatile Memory: For station presets, audio settings and setup menu option settings.
- Segmented LCD with White LED backlighting
- Electronic AM/FM Tuner (US/Flora selectable)
- USB 2.0 (MP3 and WMA audio playback)
- iPod/ iPhone Ready (via USB)
- Receives Bluetooth audio (A2DP) and controls (AVRCP) from BT enabled source
- App Ready (Marine Audio)
- Rear AUX In : (RCA)
- Pre-Amp Out: Rear Channel only (RCA)
- Wired Remote ready compatible with MARC 100
- Reap Tone confirmation (user selectable Off/Reap/Click)
- BQ Presets (Flat, Rock, Pop, Classical, User settings)
- Conformation Coated PCB
- UV Resistant: ASTM D4329 compliant
- Corrosion Resistant Material/ Finishing ASTM B117 compliant
- Low Battery warning: Audible over audio output and visual on displays when Battery voltage is <10.8V.
- Uses ISO 10487 locking connector for power/ speaker
- Regulatory Certifications: FCC, CE, RoHS, UL60065

Specifications

General Specifications

| | | |
|-----------------------------|--------------------------|---------------|
| Power System | 12 VDC | |
| Operating Voltage Range | 10 V to 16 V | |
| Current Draw @ 12V | Idle | 48 mA |
| | Nominal | 1.5 A |
| | Maximum | 18A |
| Operating Temperature Range | -4°F to 149°F | -20°C to 65°C |
| Storage Temperature Range | -22°F to 158°F | -30°C to 70°C |
| Maximum Relative Humidity | 100% | |
| Overall Dimensions | 2.7" H x 6.4" L x 1.3" D | |
| Product Weight (unpackaged) | 3.0 lbs | |

Performance Specifications

| | | |
|---------------------------|---------------------------------|--------------------|
| FM Sensitivity | 1.5 mV | |
| AM Sensitivity | 30 mV | |
| Output Power | RMS @ 1% THD | 21 Watts / Channel |
| | Maximum | 40 x 4 Watts |
| Total Harmonic Distortion | 0.5 % | |
| Applied Test Suite | ASA ES0001 | |
| Regulatory Certification | FCC Part 15B; CE; RoHS, UL60065 | |



MARINE ENTERTAINMENT