


App Ready.®



MARC200
Remote Control

KEY FEATURES

- Two-piece modular design (commander and tuner/amplifier module)
- Waterproof commander (IPX6) and module (IPX5)
- App Ready -ASA Audio pp controls all of the primary functions of App Ready Marine Audio stereos directly from a phone or tablet.
- Bluetooth® interface capability (A2DP/AVRCP)
- SiriusXM-Ready™ (tuner and subscription required)
- Seven-channel NOAA weatherband
- AM/FM electronic tuner (US/Euro selectable)
- USB jack for connection of digital media devices (requires JENAX audio input jack)
- Full iPod®/iPhone® controls and charging via USB
- AUX line-level audio input (RCA)
- Four-channel line-level audio output (RCA, front & rear)
- EQ Presets
- Two-wire power system with non-volatile memory
- Wired remote control capable (MARC200)
- Conformal coated circuit boards
- Corrosion resistant materials/finishes (ASTM B117)
- UV resistant front panel (ASTM D4329)
- Low battery warning
- Regulatory certifications: C-Tick/RoHS
- App control: compatible with both Apple & Android users

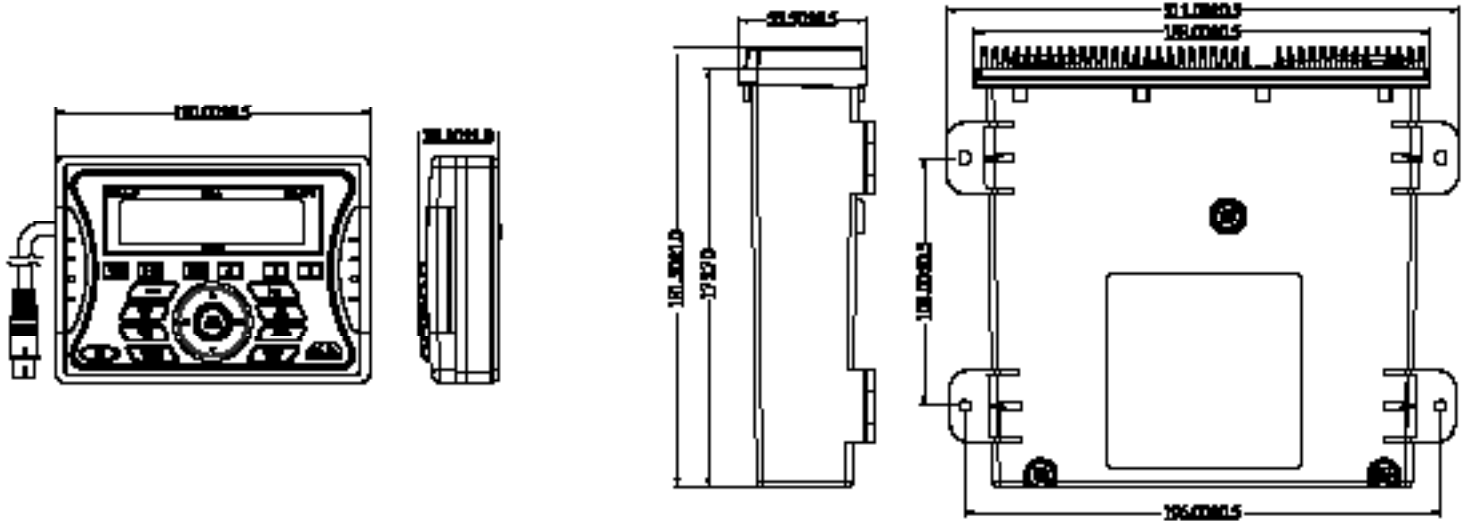

| Specifications | | |
|-----------------------------------|--------------------------------|--------------------|
| General Specifications | | |
| Power System | 12 VDC | |
| Operating Voltage Range | 10 V to 16 V | |
| Current Draw @ 12V | Idle | 103 mA |
| | Nominal | 450 mA |
| | Maximum | 9.71 A |
| Operating Temperature Range | 14°F to 140°F -10°C to 60°C | |
| Storage Temperature Range | -4°F to 158°F -20°C to 70°C | |
| Maximum Relative Humidity | 100% | |
| Overall Package Dimensions | L x W x H | |
| Product Weight (unpacked) | 2.7 lbs. | |
| Performance Specifications | | |
| FM Sensitivity | 2 mV | |
| AM Sensitivity | 30 mV | |
| Output Power | RMS | 20.4 W per channel |
| | Maximum | 50 x 4 W |
| Total Harmonic Distortion | 0.1 % | |
| Applied Test Suite | ASA ES0001 | |
| Regulatory Certifications | FCC Part 15B, CE, C-Tick, RoHS | |