



5.25" Waterproof Speaker [MS5006W]



KEY FEATURES:

- Max power handling: 30 watts
- Waterproof
- Sensitivity: 91dB
- Frequency: 79Hz-20kHz
- Nominal impedance: 4 Ohms
- Polypropylene cloth woofer cone: 5.25"
- Magnet: 2.9 oz.
- Mounting hole diameter: 4.5"
- Mounting depth: 1.5"
- Tweeter type: Whizzer
- Tweeter material: Mylar
- One-piece molded chassis with integrated drip-edge
- Corrosion resistant finishes/materials (ASTM B117)
- UV resistant finishes/materials (ASTM D4329)



MARINE CERTIFIED

asa
ELECTRONICS

2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



5.25" Waterproof Speakers [MS5006W]

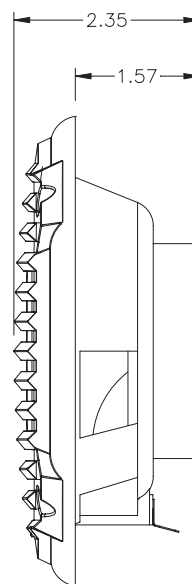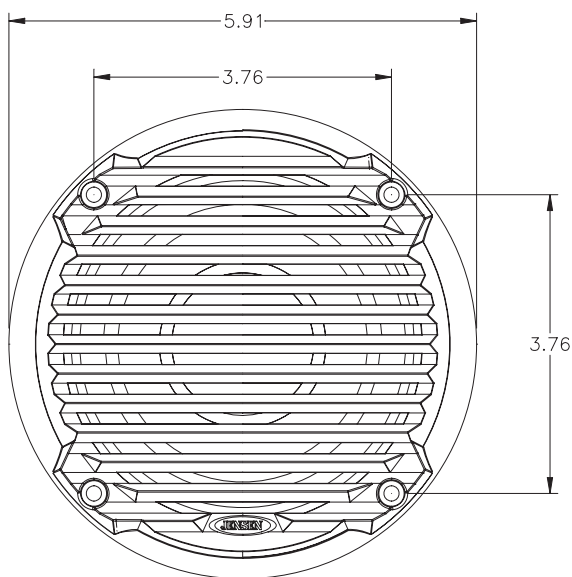

Specifications:

General Specifications:

| | | |
|-------------------|------------------------|-----------------|
| Woofer Size | 5.25" | |
| Woofer Material | Grey PP cloth surround | |
| Tweeter Type | Whizzer Cone | |
| Tweeter Material | Mylar | |
| Voice Coil Size | 3/4" | |
| Magnet Weight | 2.9oz | |
| Mounting Depth | 1.57" | |
| Hole Size | 4 1/2" | |
| Impedance | 4 Ohms | |
| Temperature Range | -30°C - 70°C | -22°F - 158°F |
| Max RH | 100% | |
| Terminal Size | Positive - 1/4" | Negative - 1/5" |

Performance Specifications:

| | |
|--------------------|----------------|
| Frequency Response | 79 Hz – 20 KHz |
| RMS Power Range | 12W |
| Max Input Power | 30W |