



6.5" Coaxial Speakers

[MSX60RV]



KEY FEATURES:


- Max Power Handling: 75 Watts
 - Sensitivity: 91dB
 - Frequency: 65Hz-20kHz
 - Nominal Impedance: 4 Ohms
 - Polypropylene Woofer: 6-1/2"
 - Magnet: 11 oz.
 - Mounting Hole Diameter: 5"
 - Mounting Depth: 2-1/3"
 - Tweeter Type: Dome
 - Tweeter Material: Titanium
- ASTM B117 Salt Spray Exposure Standard Compliant
ASTM D4329 UV Exposure Standard Compliant

MARINE CERTIFIED

asa
ELECTRONICS
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



6.5" Coaxial Speakers [MSX60RV]

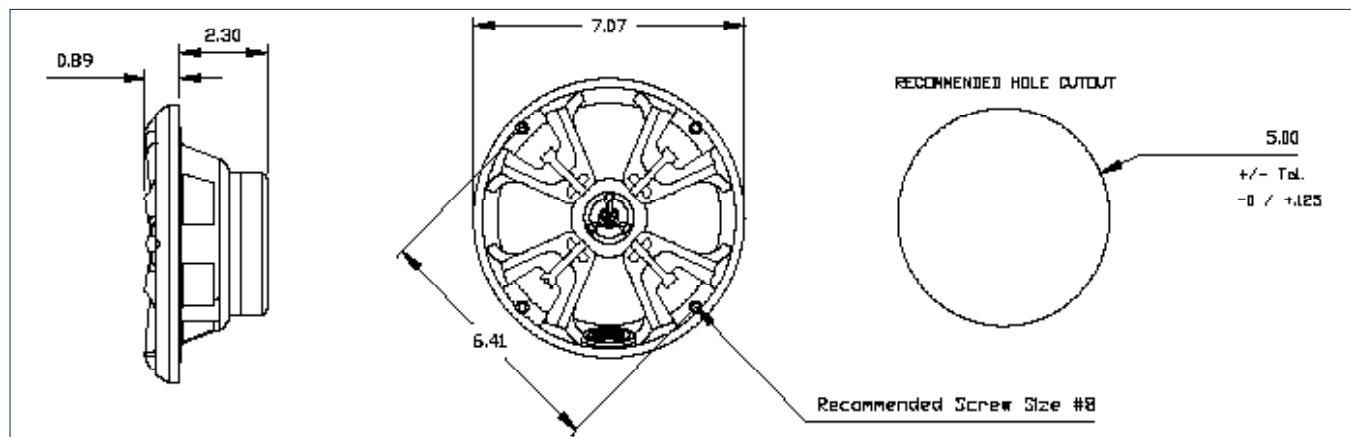

Specifications:

General Specifications:

Woofer Size	6.5"	
Woofer Material	Poly-propylene	
Tweeter Type	Standard	
Tweeter Material	Silk	
Voice Coil Size	1"	
Magnet Weight	11oz	
Mounting Depth	2.3"	
Hole Size	5"	
Impedance	4 Ohms	
Temperature Range	-30°C - 70°C	-22°F - 158°F
Max RH	100%	
Terminal Size	Positive - 1/4"	Negative - 1/4"

Performance Specifications:

Frequency Response	65 Hz – 20 KHz
RMS Power Range	30W
Max Input Power	75W