




6.5" Coaxial Marine Speakers

[MSX65R]

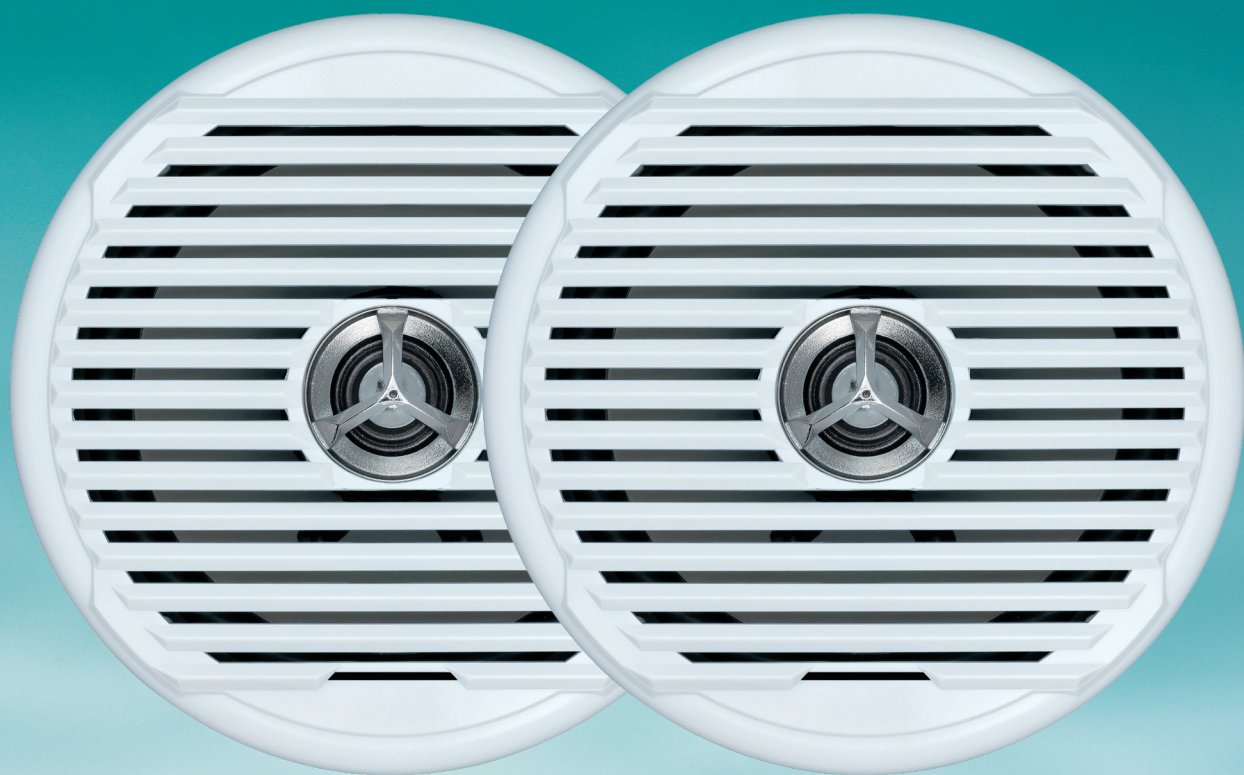

KEY FEATURES:

- 75 watts peak (35 RMS)
- 65 Hz - 20 KHz usable frequency response
- Neodymium magnet dome tweeter
- 4 ohms impedance
- 6.5" polypropylene woofer
- 11 oz magnet
- Rubber suspension
- 2.3" mounting depth
- Flush mount
- Sets of both silver and white grilles included
- Corrosion resistant (ASTM B117)
- UV resistant (ASTM D4329)


MARINE CERTIFIED

asa
ELECTRONICS

2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com



6.5" Coaxial Marine Speakers [MSX65R]

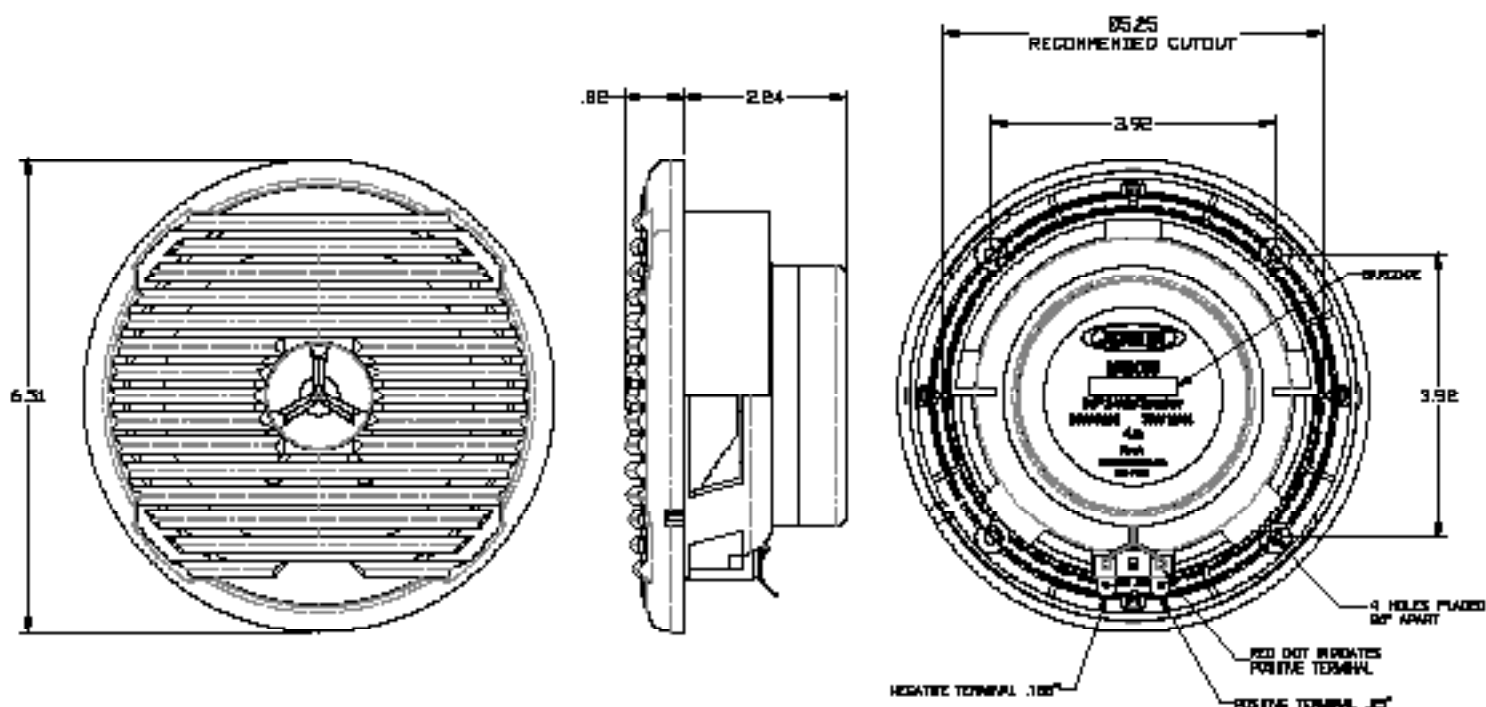

Specifications: General Specifications:

Woofer Size	6.5"	
Woofer Material	Poly-propylene	
Tweeter Type	Dome	
Tweeter Material	Silk	
Voice Coil Size	1"	
Magnet Weight	11oz	
Mounting Depth	2.3"	
Hole Size	5.25"	
Impedance	4 Ω	
Temperature Range	-30°C - 70°C	-22°F - 158°F
Max RH	100%	
Terminal Size	Positive - 1/4"	Negative - 3/16"

Performance Specifications:

Frequency Response	65 Hz - 20 KHz	
RMS Power Range	35W	
Max Power	75W	
SPL @ 1 W/ 1 M	88 dB	
Resonant Frequency	75 Hz	