



DESIGNED TO MOVE [YOU][®]

MXA6BA

6" Amplified Subwoofer



KEY FEATURES

- Max Power Handling: 200 Watts
 - Power System: 12VDC
 - Frequency: 40Hz-280Hz
 - Water Resistant
 - Conformal coated PCB
 - Vertical and horizontal mounting provisions
 - Easy access to gain control and frequency response
 - Overall Dimensions: 16"W x 8.5"H x 3.75"D
- ASTM B117 Salt Spray Exposure Standard Compliant
ASTM D4329 UV Exposure Standard Compliant




ASAelectronics.
THE MOBILE ELECTRONICS COMPANY SINCE 1977
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

MARINE ENTERTAINMENT

**JENSEN®**

MXA6BA

6" Amplified Subwoofer

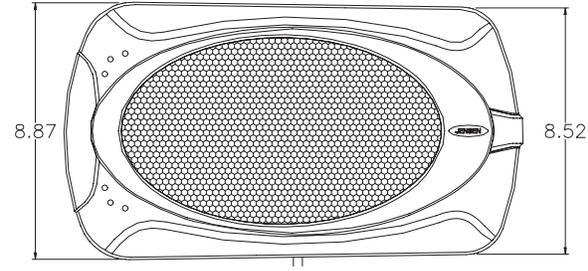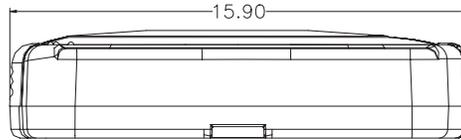

General Specifications

Power System	12 VDC	
Operating Voltage Range	10VDC to 16VDC	
Current Draw @ 12V	Idle	8mA
	Nominal	335mA
	Maximum	6.8A
Operating Temperature Range	-4°F to 149°F	-20°C to 65°C
Storage Temperature Range	-22°F to 176°F	-30°C to 80°C
Maximum Relative Humidity	100%	
Overall Dimensions	16"x 8.5" x 3.75"	
Product Weight (unpackaged)	7.5Lbs	

Speaker / Amplifier Specifications

Voice Coil Impedance	4 Ohms
Voice Coil Size	30mm
Frequency Response	40Hz to 280Hz
Magnet Size	100mm x 15mm
Max Power Output	200W