

JENSEN
PowerSports
AUDIO

App Ready | Bluetooth | SiriusXM Ready | Waterproof Stereo

P1




App Ready

Features

- 4.3" color TFT display commander
- 200 watts maximum power handling (50W x 4)
- Two-piece modular design (commander and hideaway module)
- Waterproof commander (IPX6) and module (IPX5)
- App Ready - All primary unit functions can be controlled by any iOS or Android-based mobile device with downloaded ASA Audio app
- Made for iPod/iPhone (via Bluetooth)
- Bluetooth streaming audio (A2DP) and controls (AVRCP)
- SiriusXM-Ready™ (requires SXV300V1M tuner and subscription)
- EQ Presets
- USB 2.0 for playback of MP3 and WMA audio files
- Seven-channel NOAA weatherband tuner
- Station Presets: 18 FM, 12 AM, 18 SAT
- Auxiliary line-level audio input (RCA)
- Four-channel line-level audio output (RCA, front + rear)
- Silicone rubber protective cover
- Two-wire power system with non-volatile memory
- Wired remote control capable (PRC100BC, PRC200BC)
- Low battery warning
- Conformal coated circuit boards
- Corrosion resistant materials/finishes (ASTM D1141)
- UV resistant materials/finishes (ASTM D4329)
- Dimensions: 7.4" x 7.4" x 2.2" Tuner/Amp
6.4" x 4.5" Commander

We Play Dirty!

PARTS
UNLIMITED

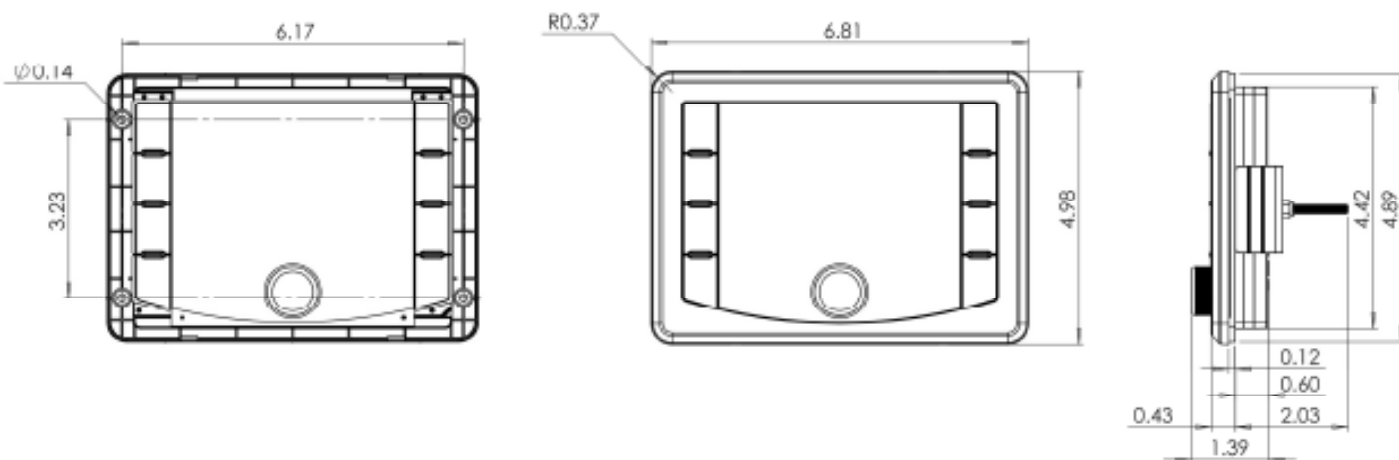

Specifications

General Specifications

Power System		12 VDC
Operating Voltage Range		18V to 16V
Current Draw @ 12V	Idle	118 mA
	Nominal	1.4 A
	Maximum	18 A
Operating Temperature Range		-14°F to 148°F -20°C to 65°C
Storage Temperature Range		-22°F to 158°F -30°C to 78°C
Maximum Relative Humidity		100%
Overall Package Dimensions		7.4 x 7.4 x 2.2 mm/inch 6.81 x 4.98 x 1.81 mm/inch
Product Weight (unpacked)		2.5 lbs.

Performance Specifications

FM Sensitivity		14 µV
AM Sensitivity		28 µV
Output Power	RMS @ 1% THD	20W x 4
	Maximum	50W x 4
Total Harmonic Distortion		0.1%
Applied Test Suite		ASA ECOM1
Regulatory Certification		FCC Part 15B, CE, MT, RoHS

Display Specifications

Resolution		688 x 772
View Angle	Top	70°
	Bottom	50°
	Left	70°
	Right	70°
Brightness		3000 cd/m²