



UMCX650

6.5" High Performance Coaxial Speaker




Features:


- UV Resistant (ASTM-D4329 compliant)
- Water & Corrosion Resistant Sealed Design
- All Plastic Chassis construction
- MICA filled Polypropylene cone
- Santoprene Surround
- Mounting Gasket
- AUX terminals for UMTM200HB
- Optional LED lit kit available (UMCX650LK1- Blue or White Selectable)




UMCX650LK1

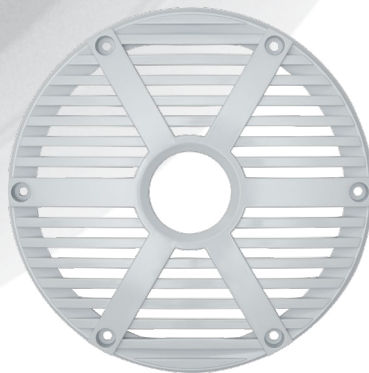


UMCX650HGW

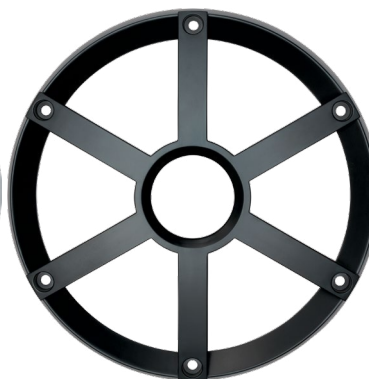

UMCX650SGB

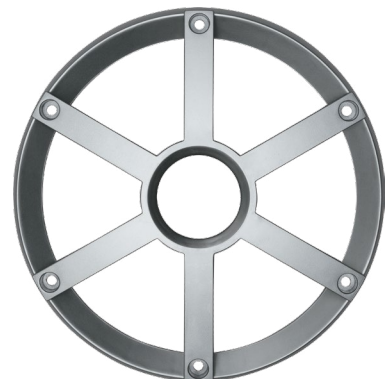

UMCX650SGS

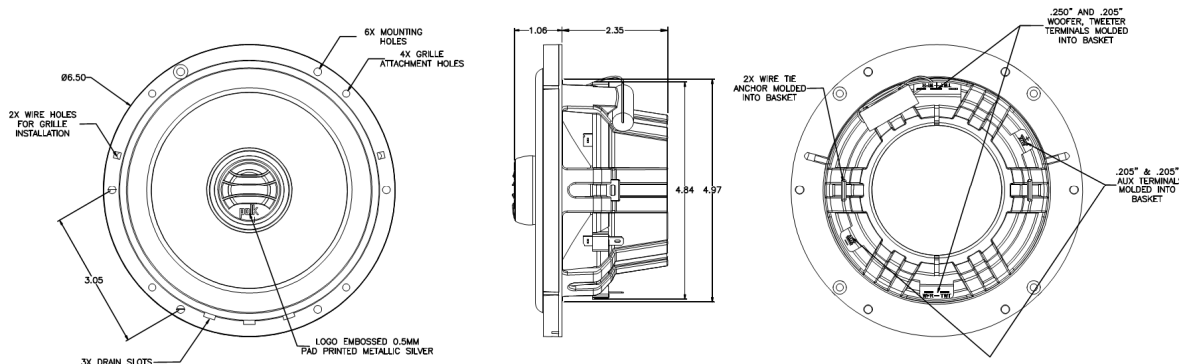

Specifications:

General Specifications:

Woofers Size	6"	
Woofers Material	Poly-propylene	
Tweeter Type	Dome	
Tweeter Material	Aluminum	
Voice Coil Size	1" KSV	
Magnet Weight	8.9 oz.	
Mounting Depth	2.4"	
Hole Size	5.0"	
Impedance	4 Ω	
Temperature Range	-30°C - 70°C	-22°F - 158°F
Max RH	100%	
Terminal Size	Positive - 0.250"	Negative - 0.205"

Performance Specifications:

Frequency Response	50 Hz – 20 KHz
RMS Power	100W
Max Power	200W
SPL @ 1 W/ 1 M	88 dB
Resonant Frequency	70 Hz