

Voyager

Severe Duty

VOM43HD

Camera Observation System



FEATURES

- Three camera capability
- IPX6 rating
- Bright 4.3" TFT LCD display with anti-glare/scratch protective lens
- Display graphic overlay shows real-time distance from objects
- Built-in speaker
- Manual or automatic source selection
- Turn-signal trigger inputs
- Screen saver mode
- e-Mark certified



VCCYL37



VCMS140i



VCMS155B



asa
ELECTRONICS
2802 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

Voyager®

Severe Duty

VOM43HD

Camera Observation System

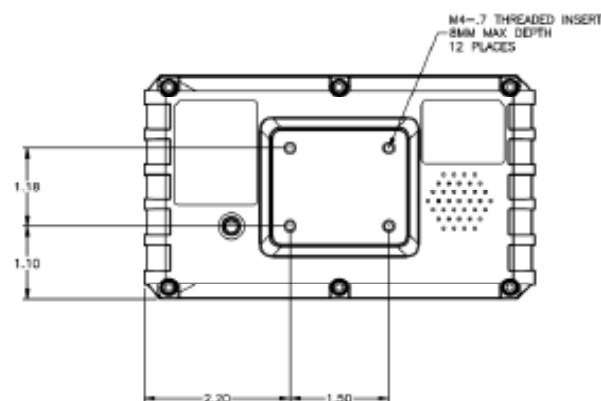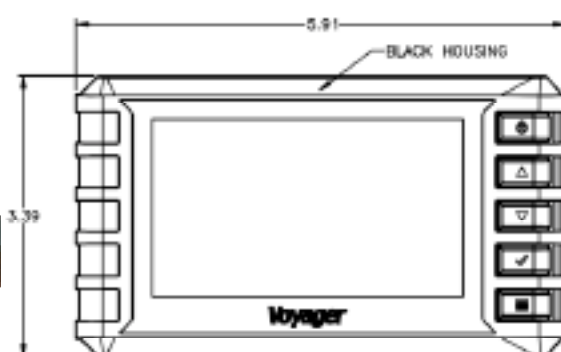

SPECIFICATIONS:

General Specifications:

Power System	12 V DC	
Operating Voltage Range	9V to 24V	
Current Draw @ 12V with 4 cameras connected	Idle	460mA
	Nominal	762mA
	Maximum	1.1A
Operating Temperature Range	-22°F to 176°F	-30°C to 80°C
Storage Temperature Range	-40°F to 185°F	-40°C to 85°C
Maximum Relative Humidity	100%	
Overall Dimensions	5.91"(W) x 3.39"(H) x 1.09"(D)	
Product Weight (unpacked)	lbs	
Water Resistance level	IPx6	

Performance Specifications:

Video / Display System		NTSC/PAL
Video Input Signal (Composite)		1V P-P @ 75Ω
Audio Output		1W
LCD Specifications	Diagonal Size	4.3"
	Resolution	480 x 272
	Brightness	500 nit
	Contrast Ratio	500:1
	View Angles	Top 70°
		Bottom 70°
		Left 60°
		Right 60°
	Display Format	16:9
	Response Time	Rise 15ms
		Fall 20ms
	Backlight Type	LED
	Backlight Life	20,000 Hours