

Mirrored Monitor

VOM73MMT





KEY FEATURES

- 7" widescreen, TFT LCD panel
- Three-camera inputs with tri-view
- Auto-detects NTSC/PAL signal
- Built-in audio speaker (supports audio for CA1)
- Manual or triggered source selection
- Turn-signal (pulsed DC) compatible trigger inputs
- Menu-selectable scale marker
- Non-volatile memory for picture, volume and image adjustment settings
- FCC Certified



Mirrored Monitor

VOM73MMT

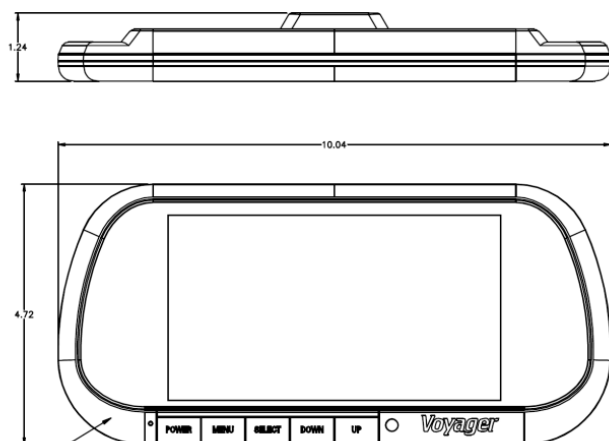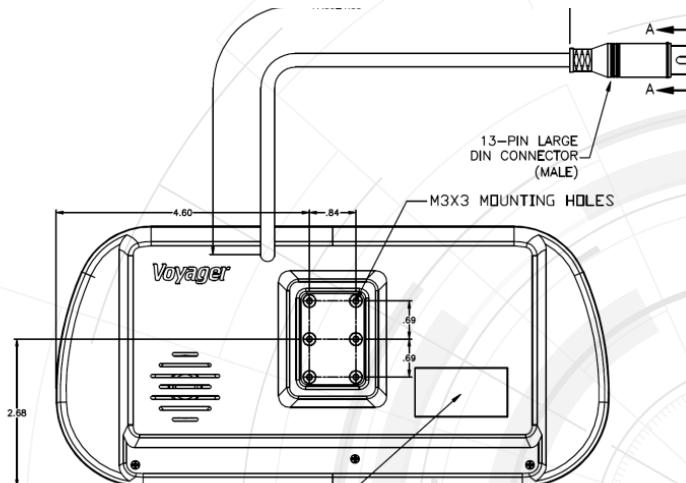

SPECIFICATIONS:

General Specifications:

Power System	12VDC	
Operating Voltage Range	10V ~ 32V	
Current Draw @ 12V	Idle	106mA
	Nominal	650mA (with all cameras connected)
	Maximum	702mA (with all cameras connected)
Operating Temperature Range	-22°F to 185°F	-30°C to 85°C
Storage Temperature Range	-40°F to 203°F	-40°C to 95°C
Maximum Relative Humidity	85%	
Overall Dimensions (inches)	10.04(W) x 4.72(H) x 1.24(D)	
Product Weight (unpackaged)	1.4 lbs(Monitor only)	

Performance Specifications:

Video / Display System			NTSC/PAL		
Video Input Signal (Composite)			1V P-P @ 75Ω		
Audio Output			1W		
LCD Specifications	Diagonal Size		7"		
	Resolution		800 x 480		
	Brightness		400 nit		
	Contrast Ratio		500:1		
	View Angles	Top	70°		
		Bottom	50°		
		Left	70°		
		Right	70°		
	Display Format (aspect ratio)		Analog 16:9		
	Response Time	Rise	10ms		
		Fall	15ms		
Backlight Type		LED			
Backlight Life (min)		50,000 Hours			

Features and specifications subject to change without notice.

