## Replacement Rearview Mirror Monitor

## FEATURES

• 7" TFT LCD display with highly-reflective glass surface that serves as a rearview mirror when back-up camera system is not active

ტ

- 12VDC power
- PAL/NTSC compatible

Voyager.

- 16:9 aspect ratio
- Three camera inputs
- Manual (push button) or automatic (trigger) source selection
- Built-in speaker



## CAMERA OPTIONS

Voyager



VCMS50i




VCMS17B



EXPAND your vision

## Replacement Rearview Mirror Monitor VOM74MM

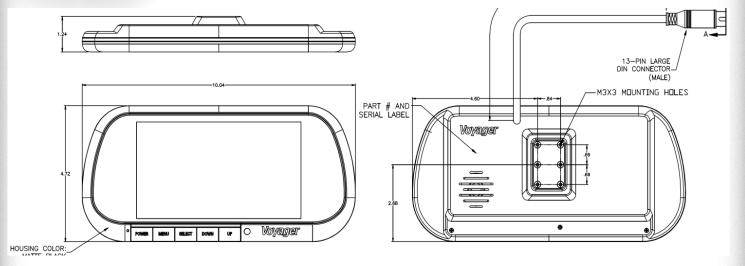

Voyager.

Power System			12VDC	
Operating Voltage Range			$10V \sim 32V$	
	Idle		55mA	
Current Draw @ 12V	Nominal		407mA	
	Maximum		493mA	
Operating Temperature Range			-22°F to 185°F	-30°C to 85°C
Storage Temperature Range			-40°F to 203°F	-40°C to 95°C
Maximum Relative Humidity			85%	
Overall Dimensions (inches)			10.04(W) x 4.72(H) x 1.24(D)	
Product Weight (unpackaged)			1.4 lbs( Monitor only)	
<b>Performance Spe</b>	cifications:			
Video / Display System			NTSC/PAL	
Video Input Signal (Composite)			1V P-P @ 75Ω	
Audio Output			1W	
LCD Specifications	Diagonal Size		7"	
	Resolution		800 x 480	
	Brightness		400 nit	
	Contrast Ratio		500:1	
	View Angles	Тор	70°	
		Bottom	50°	
		Left	70°	
		Right	70°	
	Display Format (aspect ratio)		Analog 16:9	
	Response Time	Rise	10ms	
		Fall	15ms	
	Backlight Type		LED	
	Backlight Life (min)		50,000 Hours	