



VOM74MM

FEATURES:


- 7" TFT LCD display
- 16:9 aspect ratio
- Three camera inputs
- White button backlight
- Built-in speaker
- Screen Saver mode
- Manual (push button) or automatic (trigger) source selection
- Turn-signal (pulsed DC) compatible trigger inputs
- Fixed camera volume after applying trigger
- Non-volatile memory for picture, volume, and image adjustment settings

FEATURES:

- 7" wide-view LCD panel
- Back-lit controls
- Three camera inputs
- Manual (pushbutton) or automatic (trigger) source selection
- Turn-signal (pulsed DC) compatible trigger inputs (AV2, AV3)
- On-Screen Display (OSD) for AV source, picture adjustment and volume level
- Day/Night brightness modes
- Non-volatile memory for picture and volume adjustment settings
- Removable sun-visor included



VOM718

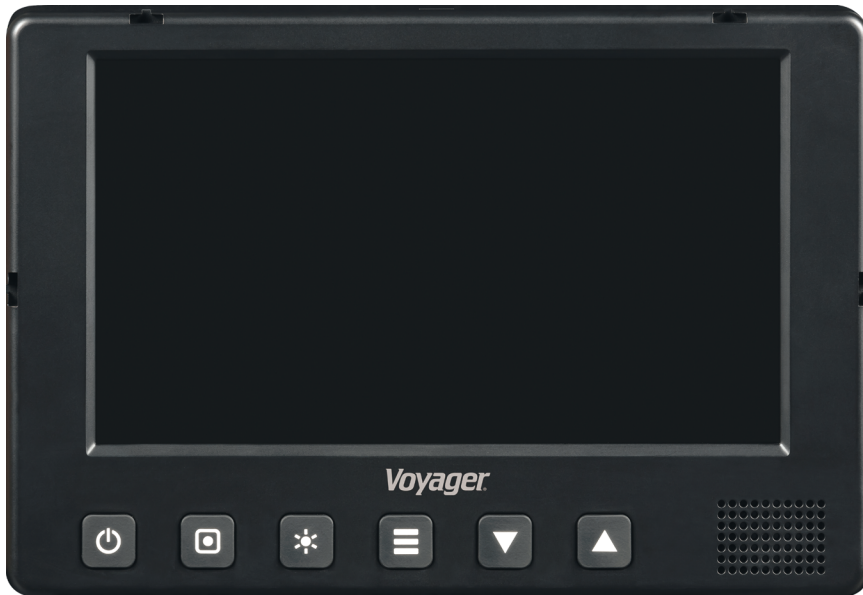


VOM719WP

FEATURES:

- 7" digital wide format color TFT LCD panel
- Single image, split-screen, or QuadView viewing modes
- Four camera inputs and six triggers
- DC auto source for switching triggers (turn signal compatible)
- Waterproof housing (IPX6)
- Manual/auto day/night display brightness control

FEATURES:

- 10" digital wide format color TFT LCD panel
- Single image, split-screen, or QuadView viewing modes
- Supports CVBS (NTSC) or AHD video inputs
- Reinforced mounting AMPs provision
- IPX6 waterproof rating
- 10 inch LCD panel
- 4 camera inputs
- 6 triggers

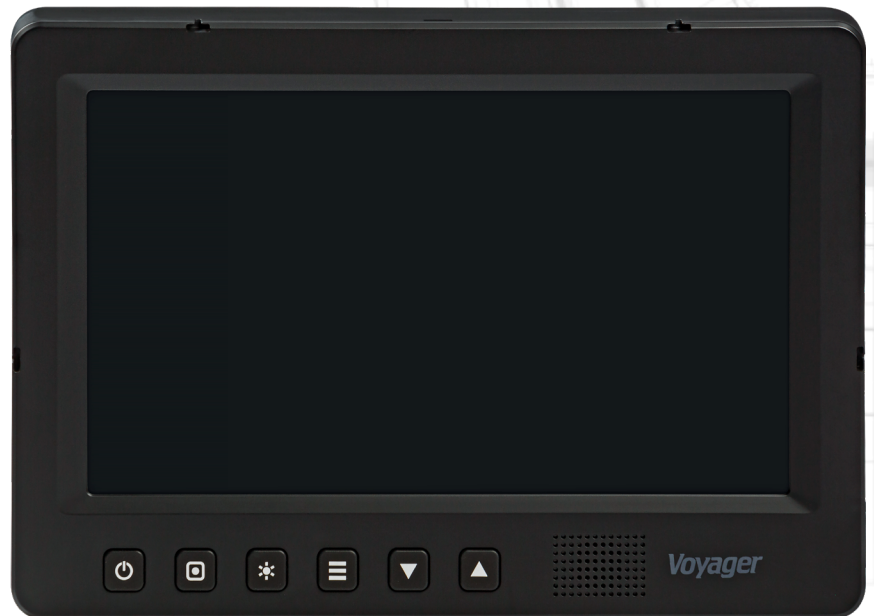

VOM1023

