

Voyager®

7" LCD Observation Monitor
VOM74TQ



PRODUCT FEATURES:

- Capacitive touchscreen for easy control
- Energy efficient white LED illumination
- Back-lit controls
- Integrated audio speaker
- NTSC and PAL video signal compatible
- Four camera inputs (only camera 3 supports audio)
- Manual (pushbutton) or automatic (trigger) source selection
- Turn-signal (pulsed DC) compatible trigger inputs
- Auto power on (standby)
- Day/Night brightness modes
- On Screen Display (OSD) for AV source, picture adjustment and volume level
- Non-volatile memory for picture and volume adjustment settings
- Removable sun-visor included
- Multiple mounting options (AMPS compatible)
- e-Mark certified and RoHS compliant


EXPAND your vision™

asa
ELECTRONICS™

2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

Voyager®

7" LCD Observation Monitor VOM74TQ

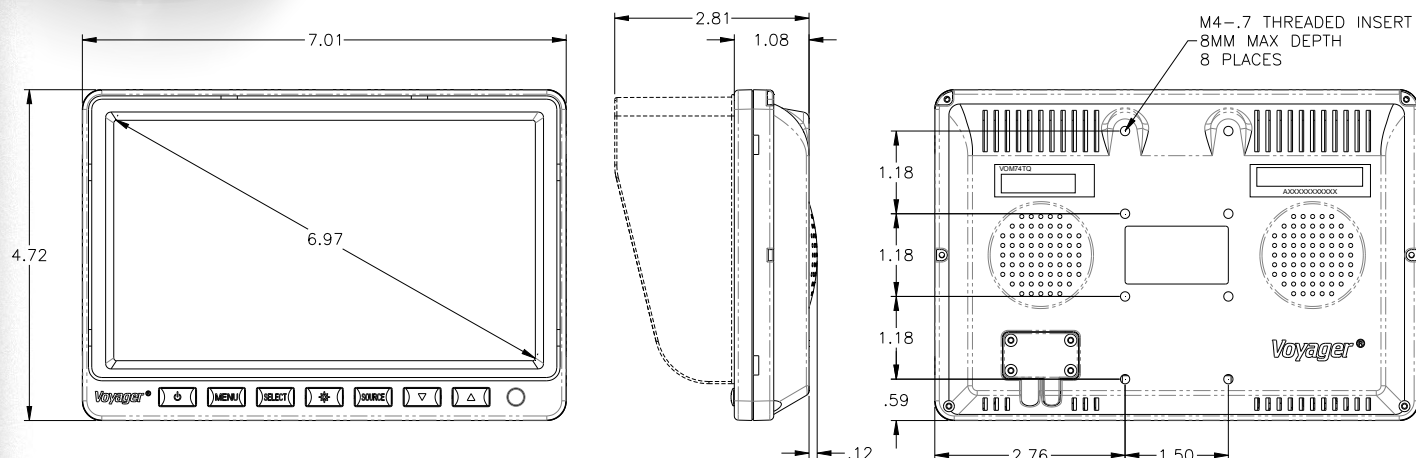

SPECIFICATIONS:

General Specifications:

Power System		12VDC
Operating Voltage Range		9V ~ 30V
Current Draw @ 12V	Idle	90mA
	Nominal	500mA
	Maximum	850mA
Operating Temperature Range		-4°F to 149°F -20°C to 65°C
Storage Temperature Range		-40°F to 176°F -35°C to 80°C
Maximum Relative Humidity		85%
Overall Dimensions (inches)		7.0(W) x 4.7(H) x 1.1(D)
Product Weight (unpacked)		1.43 lbs

Performance Specifications:

Video / Display System		NTSC/PAL
Video Input Signal (Composite)		1V P-P @ 75Ω
Audio Output		1W
LCD Specifications	Diagonal Size	7"
	Resolution	480 x 234
	Brightness	450 nit
	Contrast Ratio	400:1
	View Angles	Top
		Bottom
		Left
		Right
	Display Format (aspect ratio)	Analog 16:9
	Response Time	Rise
		Fall
	Backlight Type	LED