

Voyager[®]

4.3" Wireless Observation Monitor

WVOM43



FEATURES

- Supports up to four wireless cameras (WVCMS130AP) and one wired Voyager camera simultaneously
- Auto-Pairing capability allows monitor to be paired with any of the (up to) four wireless cameras (WVCMS130AP) with the touch of a button
- Strong signal transmits through and around objects up to 60 feet away
- Bright 4.3" display
- Compact size allows for easy storage in armrest, glovebox or center console when not in use
- Displays graphic overlay that shows real-time distance from objects while backing up
- Built-in speaker
- Suction cup mount and 12V DC plug included

EXPAND your vision[™]


asa
ELECTRONICS[™]

2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

Voyager®

4.3" Wireless Observation Monitor

WVOM43

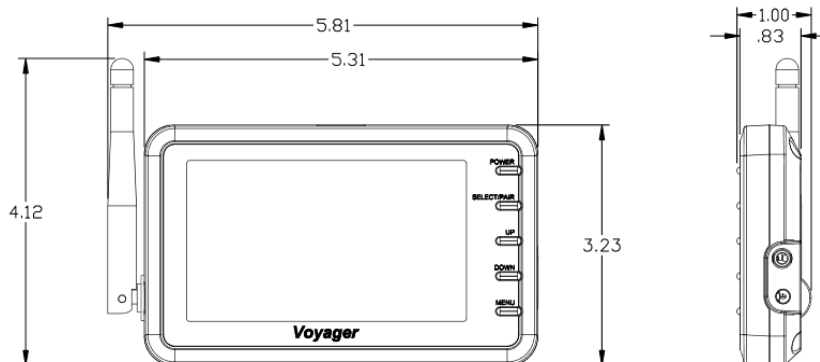

Specifications	CAMERA	MONITOR
Power System	12VDC	12VDC
Operating Voltage Range	10 ~14V	10 ~ 14V
Power Consumption (MAX)	351mA	340mA
Operating Temperature Range	-4°F to 149°F	-4°F to 149°F
Storage Temperature Range	-40°F to 185°F	-40°F to 185°F
Operating Relative Humidity	100%	95%
Waterproof Rating	IPX6	NA
Overall Dimensions	2.35"x3.35"x3.36"	1.0"x 5.8" x 4.1"
Product Weight (unpacked)	12.32 oz	6.5 oz
Video Output Signal Format	NTSC	NTSC
Video Signal Level	1.0V p-p ; 75Ω	1.0V p-p ; 75Ω
Audio	Microphone	1.5 watt
Sensor	1/3" CMOS	NA
Sensitivity	0 Lux	NA
Image Orientation	Mirror (Reversed)	NA
Resolution	520 Lines	480 x 272
View Angles	125°(D) 94°(H) 68°(V)	140°(H) 120°(V)
Brightness	NA	500 nit
Contrast Ratio	NA	500:1
Response Time	NA	10ms(ON) 15ms(OFF)
Display Format	NA	16:9