

# Voyager®

## Wireless Camera System for Prewire Prep

### WVSXP70

## WiSight® 2.0 TECHNOLOGY



### PRODUCT FEATURES:

#### Monitor (WVSXM70)

- Supports up to four wireless cameras simultaneously
- Auto-Pairing capability allows monitor to be paired with any of the wireless cameras with the touch of a button
- Strong signal transmits through and around objects up to 60 feet away
- Bright 7" display
- Supports normal and mirrored camera image
- Supports Single, Split, and Quadview camera views
- Built-in speaker
- Suction cup mount and 12V DC plug included

#### Camera (WVSXC160)

- 12VDC power
- High-performance color optics
- CMOS Sensor technology
- IR LED Low-light assist
- Waterproof
- Integrated microphone
- Wide viewing angle



If this plate is on the back of your RV, you are

**PREWIRED  
FOR  
Voyager®**


NOTE: This system is only compatible with Voyager pre-wired vehicles.

**asa**  
ELECTRONICS®  
2602 Marina Drive • Elkhart, IN 46514  
[www.asaelectronics.com](http://www.asaelectronics.com)

# Voyager®


## Wireless Camera System for Prewire Prep

### WVSXP70

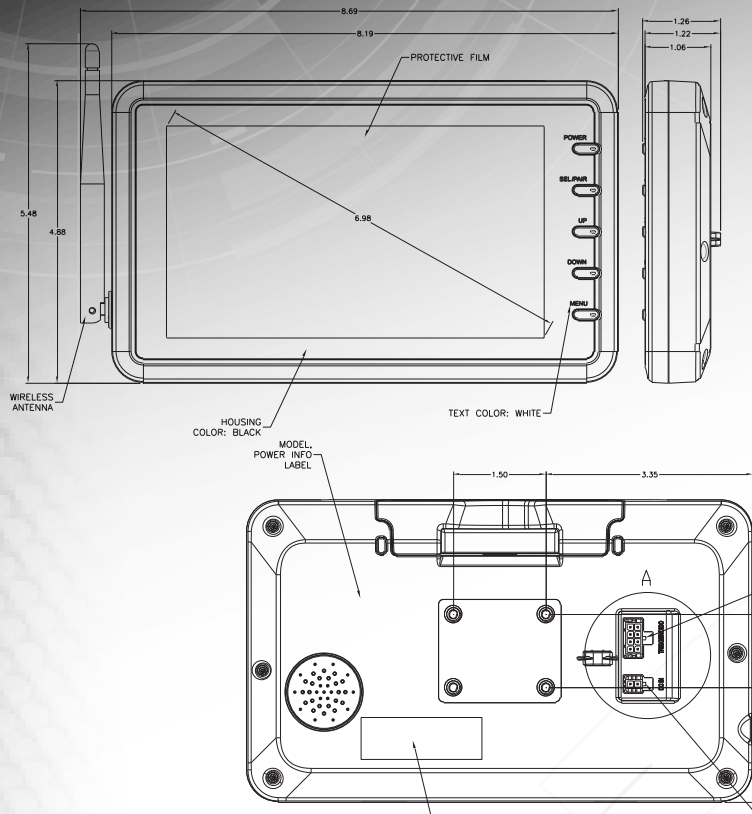

#### Specifications

Power System	12VDC
Operating Voltage Range	10 ~ 16V
Power Consumption (MAX)	675 mA
Operating Temperature Range	-4°F to 149°F
Storage Temperature Range	-22°F to 158°F
Operating Relative Humidity	95%
Overall Dimensions	1.06"x 4.88" x 8.19"
Product Weight (unpacked)	18.4 oz
Video Output Signal Format	NTSC
Video Signal Level	1.0V p-p ; 75Ω
Audio	1.0 watt
Resolution	800 x 480
View Angles	70°(H) 70°(V)
Brightness	400 nit
Contrast Ratio	500:1
Response Time	30ms(R) 40ms(F)
Display Format	16:9

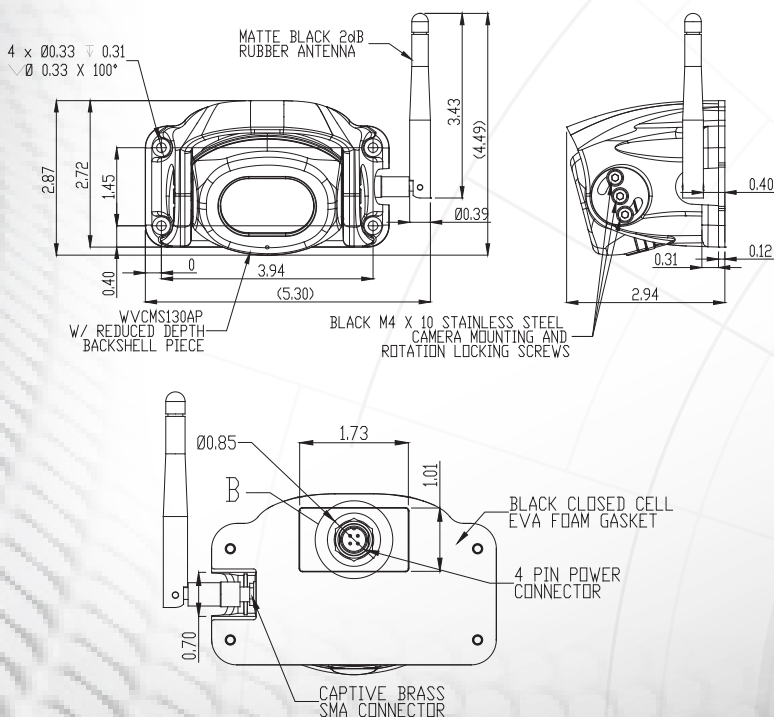

#### Specifications

#### CAMERA

Power System	12VDC
Operating Voltage Range	10 ~ 18V, Supports GM PWM
Power Consumption (MAX)	230 mA
Operating Temperature Range	-20°C to 65°C
Storage Temperature Range	-30°C to 85°C
Operating Relative Humidity	100%
Waterproof Rating	IPX6
Overall Dimensions	5.52"x 3"x 2.82"
Product Weight (unpacked)	10.56 oz
Video Output Signal Format	NTSC
Video Signal Level	1.0V p-p ; 75Ω
Audio	Microphone
Sensor	1/3" CMOS
Sensitivity	0 Lux
Image Orientation	Mirror (Reversed)
Resolution	1.3MP ( 960p HD)
View Angles	135°(D) 102°(H) 72°(V)

Features and specifications subject to change without notice.