

Product Change Notice

The SiriusXM SRA25B antenna is being discontinued, the replacement will be the SRA50B antenna. The mounting will be the same as it was with the SRA25B. The antenna footprint is slightly larger, but the bolt and nut to mount the antenna are the same size.



Based on usage this change will take effect approximately June/July 2016.



- Sleek ultra low-profile design looks good on a boat or vehicle
- 4-way mounting system (Flush, low profile, standard, and pedestal).
- Flexibility to choose from 4 ways to mount your SRA-50
- White UV-stabilized housing that is resistant to discoloration
- 25 ft. high quality coax cable
- RoHS compliant
- Flush mount dimensions: 2.45" x .75"
- Pedestal dimensions: 3.6" x 3.94"

If you have any questions regarding this product change or want information on specific pricing, please contact your ASA sales representative or ASA Customer Service at 574-264-3135 or 800-688-3135.

Notification Date: 2/23/16

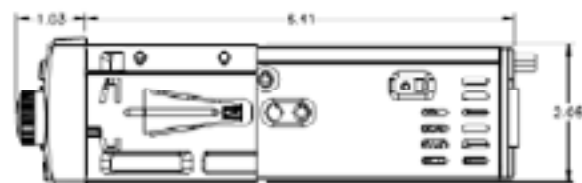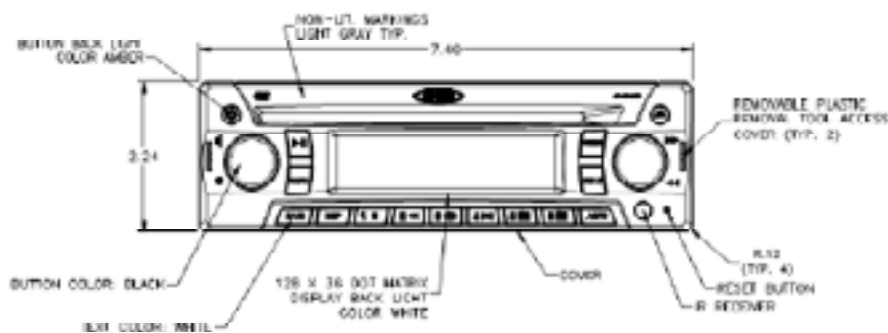

Features:

- 3 Wire power(ACC, BAT+, GND)
- 1-DIN (sleeve-mount) chassis design
- Segmented LCD Display
- Electronic AM/FM tuner
- Station presets (3x6FM, 2x6AM)
- Single DVD / CD player (Plays DVD, CD-A, CD-R/RW Media)
- MP3 support
- Last Position Memory, Intro Scan, Repeat Track/Title, Random
- AM/FM radio
- Encoded rotary volume control
- Audio Mute / Loudness
- Auto-Store(AS), Preset Scan(PS), Seek Tuning, Manual Tuning.
- Bluetooth support
- RCA stereo input and 4-pin microphone input
- Stereo Pre-amp Audio Output (Front and Rear RCA)
- 2 parallel RCA composite AV outputs
- Preset EQ (Flat, Pop, Rock, Classic)
- Wireless (Jensen IR Codes) Credit Card size remote control (included)

Specifications

General Specifications

Power System	12VDC	
Operating Voltage Range	18V to 16V	
Current Draw @ 12V	Idle	4 mA
	Normal	3 A
	Maximum	18 A
Operating Temperature Range	-4°F to 149°F	-20°C to 65°C
Storage Temperature Range	-22°F to 158°F	-30°C to 70°C
Maximum Relative Humidity	95%	
Overall Package Dimensions	L x W x H	
Product Weight (unpacked)	3 lbs. 8 oz	

Performance Specifications

FM Sensitivity	1.6 μ V	
AM Sensitivity	31.6 μ V	
CD Frequency Response	20 Hz to 20 kHz	
CD Signal to Noise	77 dB	
CD Skip Threshold (Random Freq. Profile)	1.6 μ	
Compatible CD Formats	DVD, Audio CD, CD-R, R/W	
Output Power	RMS	16.6 W
	Maximum	4 x 40W
Total Harmonic Distortion	1%	
Applied Test Scale	ES8041	

PRELIMINARY