



AM|FM|AUX|Bluetooth®|APP READY Stereo

JWM10A





PRODUCT FEATURES

- jControl downloadable app controls the functions of your stereo
- Dedicated Bluetooth® pairing button
- Bluetooth® streaming audio(A2DP,) and controls (AVRCP) from devices in 33-foot range
- High contrast segmented LCD display with 10-level dimming
- White LED backlights
- Sleeker, thinner profile with snapside bezels to hide mounting screws
- 30 programmable station presets (18FM, 12AM)
- Auto-store/preset scan
- Two-zone audio selectable via A/B buttons
- Four speaker outputs
- 3.5mm front auxilliary audio input
- Rear RCA audio input
- 12V DC power (+12 v switched and ground)
- Alarm clock and sleep timer
- Dimensions: 10.43"W x 2.76"H x 3.5"D



DESIGNED TO MOVE [YOU]™

asa
ELECTRONICS™
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

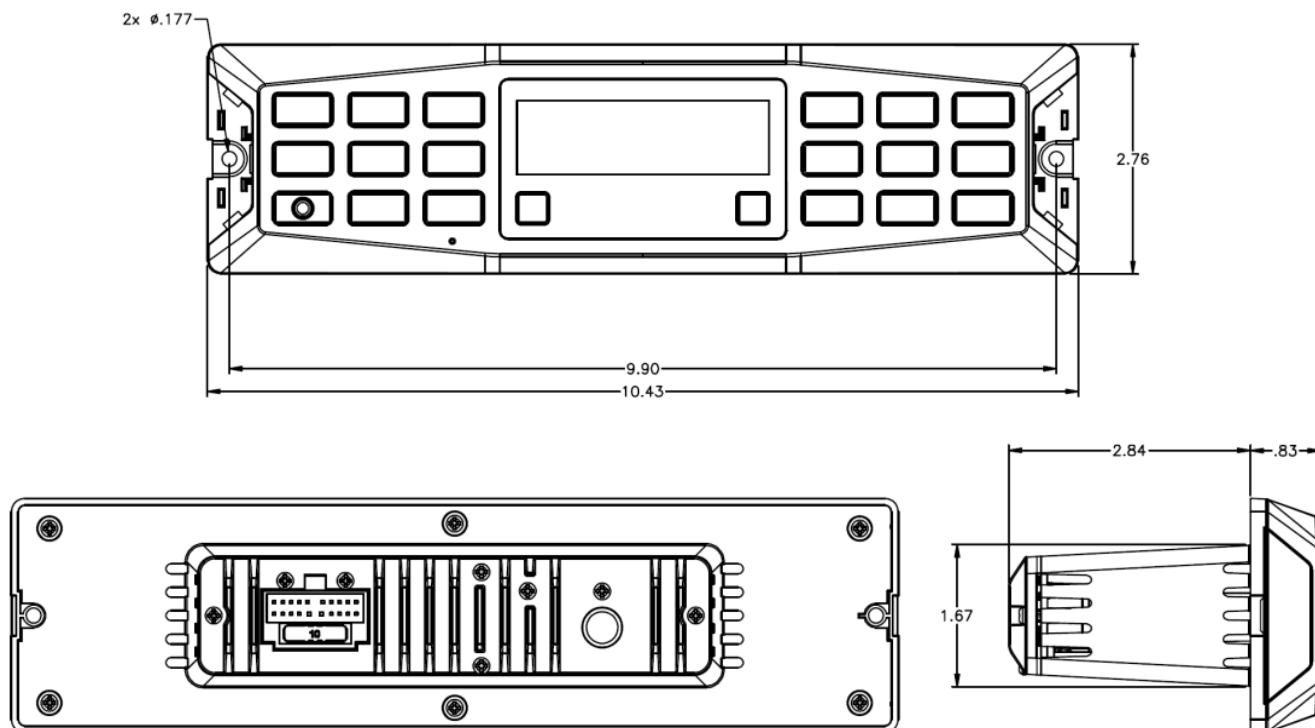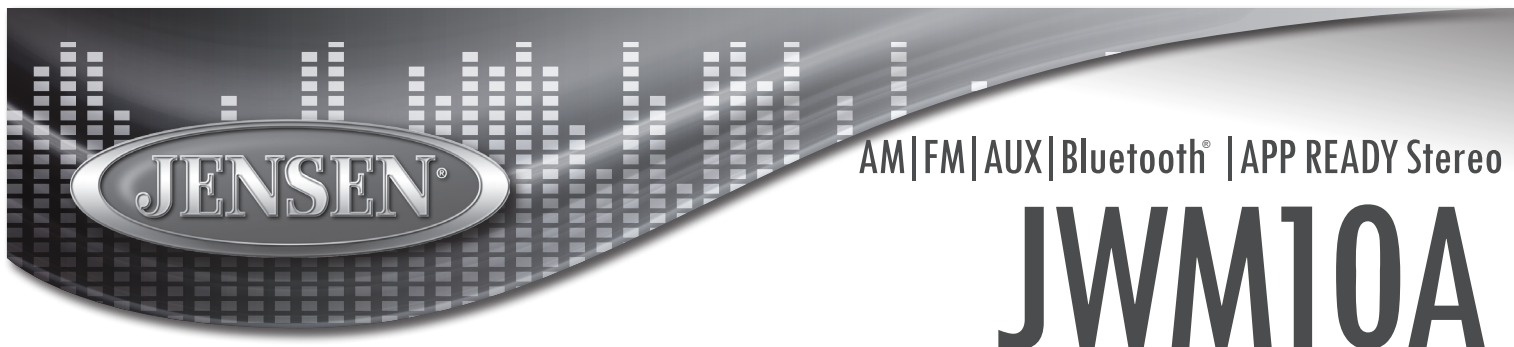

Specifications

General Specifications

Power System		12 V DC (2-wire)	
Operating Voltage Range		10 V to 16 V	
Current Draw @ 12V	Quiescent	0 A	
	Standby	110 mA	
	Nominal	1 A	
	Maximum	3 A	
Operating Temperature Range		-4°F to 149 °F	-20°C to 65°C
Storage Temperature Range		-22°F to 158°F	-30°C to 70°C
Maximum Relative Humidity		95%	
Overall Dimensions		10-7/16" W x 2-3/4" H x 3-1/2" D	
Product Weight (unpackaged)		1.0 lb	

Performance Specifications

FM Sensitivity	5 μ V
AM Sensitivity	17 μ V
Maximum Output Power	4 x 6Watts Total
Total Harmonic Distortion	1%
Applied Test Suite	ASA ES0001
Regulatory Certification	FCC Part 15B