

JENSEN®
HEAVY DUTY


Fender Mount, Self-Contained Radio & Speaker **TRA4500**




KEY FEATURES:

- AM/FM radio with full-range 5" x 7" speaker and rubber mast antenna
- 20 watts maximum
- 12 volt positive or negative ground
- 30 station presets (18FM/12AM)
- Auto seek (AS) Preset scan (PS)
- Bass/Treble/Loudness controls
- Hinged front weather cover
- High-impact, weather/dust proof ABS housing
- Built-in 3.5mm headphone jack
- Two wire hook-up, automatic vehicle polarity detection
- Dimensions: 10"W x 8"H x 8"

asa
ELECTRONICS®
2602 Marina Drive • Elkhart, IN 46514
www.asaelectronics.com

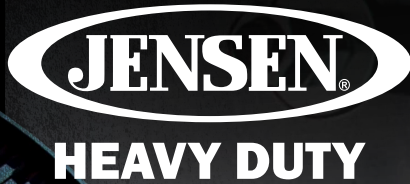

Fender Mount, Self-Contained Radio & Speaker TRA4500

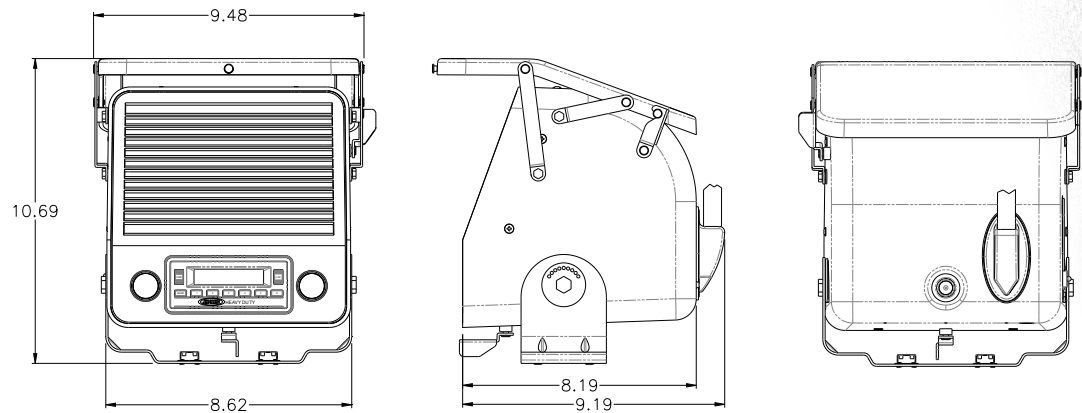

Specifications

General Specifications

Power System		12VDC
Operating Voltage Range		9.0V to 18.0V
Current Draw @ 12V	Idle	100mA
	Nominal	680mA
	Maximum	2.0A
Operating Temperature Range		-22°F to 185°F -30°C to 85°C
Storage Temperature Range		-40°F to 185°F -40°C to 85°C
Maximum Relative Humidity		95%
Overall Package Dimensions		9.2L x 8.6W x 10.7H
Product Weight (unpackaged)		7 lbs. 5oz.

Performance Specifications

FM Sensitivity	1 uV
AM Sensitivity	20 uV
Output Power RMS @ 1% THD	12 Watts
Output Power Maximum	20 watts